

PyCAMA report generated by trop12-proc

trop12-proc

2024-12-19 (02:01)

1 Short Introduction

1.1 The list of parameters

You may want to keep the list given in table 1 at hand when viewing the results.

2 Definitions

The averages shown here are *unweighted* averages:

$$\bar{x} = \frac{1}{N} \sum_{i=1}^N x_i \quad (1)$$

with N the number of observations in the dataset.

The spread of the measurements is indicated with the variance $V(x)$, or rather the standard deviation $\sigma(x) = \sqrt{V(x)}$.

$$V(x) = \frac{1}{N-1} \sum_{i=1}^N (x_i - \bar{x})^2 \quad (2)$$

We also report the more robust statistics median, minimum, maximum, various percentiles and inter quartile range.

The median m is the value of parameter x for which half of the observations of x is smaller than m :

$$P(x \leq m) = P(x \geq m) = \int_{-\infty}^m f(x) dx = \frac{1}{2} \quad (3)$$

with $f(x)$ the probability density function.

The median is a special case of a percentile. Instead of $1/2$ in equation 3, other threshold values can be used. We report results for 1 %, 5 %, 10 %, 15.9 %, 25 %, 75 %, 84.1 %, 90 %, 95 % and 99 %. The inter quartile range is the difference between the 75 % and 25 % percentiles. Similarly the minimum and maximum values correspond to the 0 % and 100 % percentiles respectively.

For normally distributed parameters the mean and median are the same, while the $\mu \pm \sigma$ values and the 15.9 % and 84.1 % percentiles coincide.

To get a measure for the relation of one variable $x_{(k)}$ with another $x_{(l)}$, we calculate the covariance matrix C_{kl} .

$$C_{kl} = C(x_{(k)}, x_{(l)}) = \frac{1}{N-1} \sum_{i=1}^N (x_{(k),i} - \bar{x}_{(k)})(x_{(l),i} - \bar{x}_{(l)}) \quad (4)$$

Rather than a dimensionally dependent covariance, it is often easier to interpret a correlation matrix R_{kl} , a matrix of Pearson's r coefficients:

$$R_{kl} = R(x_{(k)}, x_{(l)}) = \frac{C_{kl}}{\sqrt{C_{kk}C_{ll}}} = \frac{C_{kl}}{\sqrt{V(x_k)V(x_l)}} \quad (5)$$

The diagonal elements of the covariance matrix are the variances of the elements, $V(x_{(k)}) = C_{kk}$ and obviously $R_{kk} = 1$.

Variable	mean $\pm \sigma$	Count	Mode	IQR	Median	Minimum	Maximum
qa value [1]	0.825 ± 0.253	23175435	0.905	0.200	0.900	0.0	1.000
ozone total vertical column [mol m^{-2}]	0.129 ± 0.019	23175435	0.116	2.291×10^{-2}	0.125	6.150×10^{-2}	0.272
ozone total vertical column precision [mol m^{-2}]	$(3.565 \pm 4.194) \times 10^{-3}$	23175435	2.025×10^{-3}	9.854×10^{-4}	2.191×10^{-3}	8.501×10^{-4}	7.937×10^{-2}
ozone slant column density [mol m^{-2}]	0.482 ± 0.265	23175435	0.265	0.231	0.383	0.145	1.77
ozone slant column precision [mol m^{-2}]	$(3.737 \pm 4.507) \times 10^{-3}$	23175435	1.995×10^{-3}	1.055×10^{-3}	2.257×10^{-3}	8.561×10^{-4}	6.673×10^{-2}
number of iterations slant column [1]	3.04 ± 0.26	23175435	3.00	0.0	3.00	2.00	10.00
root mean square slant column fit [1]	$(1.443 \pm 1.741) \times 10^{-3}$	23175435	7.500×10^{-4}	4.083×10^{-4}	8.719×10^{-4}	3.208×10^{-4}	2.553×10^{-2}
fitted radiance shift [nm]	$(-1.077 \pm 3.325) \times 10^{-3}$	23175435	-1.500×10^{-3}	2.453×10^{-3}	-1.480×10^{-3}	-5.348×10^{-2}	7.990×10^{-2}
fitted radiance squeeze [1]	$(1.163 \pm 3.480) \times 10^{-4}$	23175435	1.000×10^{-4}	3.045×10^{-4}	1.318×10^{-4}	-2.205×10^{-2}	2.179×10^{-2}
ozone total air mass factor [1]	3.83 ± 1.88	23175435	2.25	1.84	3.15	1.89	12.7
ozone effective temperature [K]	235 ± 11	23175435	230	15.0	233	109	387
number of iterations vertical column [1]	2.06 ± 0.55	23175435	2.14	0.0	2.00	1.000	15.0

Table 2: Percentile ranges

Variable	1 %	5 %	10 %	15.9 %	25 %	75 %	84.1 %	90 %	95 %	99 %
qa value [1]	0.0	4.000×10^{-2}	0.460	0.640	0.800	1.000	1.000	1.000	1.000	1.000
ozone total vertical column [mol m ⁻²]	0.100	0.105	0.109	0.113	0.116	0.139	0.148	0.155	0.164	0.190
ozone total vertical column precision [mol m ⁻²]	1.438×10^{-3}	1.610×10^{-3}	1.712×10^{-3}	1.796×10^{-3}	1.902×10^{-3}	2.888×10^{-3}	3.991×10^{-3}	6.404×10^{-3}	1.228×10^{-2}	2.417×10^{-2}
ozone slant column density [mol m ⁻²]	0.248	0.258	0.268	0.281	0.305	0.536	0.720	0.905	1.12	1.36
ozone slant column precision [mol m ⁻²]	1.458×10^{-3}	1.639×10^{-3}	1.747×10^{-3}	1.836×10^{-3}	1.949×10^{-3}	3.004×10^{-3}	4.208×10^{-3}	6.793×10^{-3}	1.308×10^{-2}	2.588×10^{-2}
number of iterations slant column [1]	2.00	3.00	3.00	3.00	3.00	3.00	3.00	3.00	3.00	4.00
root mean square slant column fit [1]	5.625×10^{-4}	6.324×10^{-4}	6.740×10^{-4}	7.087×10^{-4}	7.525×10^{-4}	1.161×10^{-3}	1.625×10^{-3}	2.623×10^{-3}	5.052×10^{-3}	9.995×10^{-3}
fitted radiance shift [nm]	-9.807×10^{-3}	-5.274×10^{-3}	-3.869×10^{-3}	-3.154×10^{-3}	-2.549×10^{-3}	-9.586×10^{-5}	1.084×10^{-3}	2.480×10^{-3}	4.857×10^{-3}	1.054×10^{-2}
fitted radiance squeeze [1]	-1.151×10^{-3}	-3.423×10^{-4}	-1.881×10^{-4}	-1.040×10^{-4}	-2.131×10^{-5}	2.832×10^{-4}	3.627×10^{-4}	4.399×10^{-4}	5.604×10^{-4}	9.359×10^{-4}
ozone total air mass factor [1]	2.15	2.20	2.27	2.36	2.51	4.36	5.49	6.73	8.31	10.0
ozone effective temperature [K]	208	219	224	226	228	243	248	250	253	260
number of iterations vertical column [1]	1.000	1.000	2.00	2.00	2.00	2.00	2.00	3.00	3.00	4.00

Table 3: Parameterlist and basic statistics for the analysis for observations in the northern hemisphere

Variable	mean $\pm \sigma$	Count	IQR	Median	Minimum	Maximum	25 % percentile	75 % percentile
qa value [1]	0.778 ± 0.301	9121477	0.230	0.900	0.0	1.000	0.770	1.000
ozone total vertical column [mol m ⁻²]	0.135 ± 0.023	9121477	3.468×10^{-2}	0.128	8.700×10^{-2}	0.272	0.116	0.151
ozone total vertical column precision [mol m ⁻²]	$(4.810 \pm 5.573) \times 10^{-3}$	9121477	2.337×10^{-3}	2.548×10^{-3}	8.954×10^{-4}	7.937×10^{-2}	2.059×10^{-3}	4.395×10^{-3}
ozone slant column density [mol m ⁻²]	0.573 ± 0.325	9121477	0.458	0.438	0.234	1.77	0.312	0.770
ozone slant column precision [mol m ⁻²]	$(5.058 \pm 5.980) \times 10^{-3}$	9121477	2.504×10^{-3}	2.631×10^{-3}	8.982×10^{-4}	6.673×10^{-2}	2.111×10^{-3}	4.615×10^{-3}
number of iterations slant column [1]	3.08 ± 0.35	9121477	0.0	3.00	2.00	10.00	3.00	3.00
root mean square slant column fit [1]	$(1.954 \pm 2.310) \times 10^{-3}$	9121477	9.669×10^{-4}	1.016×10^{-3}	3.425×10^{-4}	2.553×10^{-2}	8.150×10^{-4}	1.782×10^{-3}
fitted radiance shift [nm]	$(-2.555 \pm 38.201) \times 10^{-4}$	9121477	3.010×10^{-3}	-8.402×10^{-4}	-3.844×10^{-2}	4.132×10^{-2}	-2.019×10^{-3}	9.908×10^{-4}
fitted radiance squeeze [1]	$(1.126 \pm 4.092) \times 10^{-4}$	9121477	3.604×10^{-4}	1.228×10^{-4}	-7.985×10^{-3}	5.843×10^{-3}	-5.446×10^{-5}	3.059×10^{-4}
ozone total air mass factor [1]	4.24 ± 1.99	9121477	2.40	3.48	2.12	11.2	2.74	5.14
ozone effective temperature [K]	228 \pm 8	9121477	8.56	229	130	300	224	233
number of iterations vertical column [1]	2.14 ± 0.61	9121477	0.0	2.00	1.000	14.0	2.00	2.00

Variable	mean $\pm \sigma$	Count	IQR	Median	Minimum	Maximum	25 % percentile	75 % percentile
qa value [1]	0.855 ± 0.210	14053958	0.1000	0.900	0.0	1.000	0.900	1.000
ozone total vertical column [mol m ⁻²]	0.125 ± 0.014	14053958	1.806×10^{-2}	0.123	6.150×10^{-2}	0.256	0.115	0.134
ozone total vertical column precision [mol m ⁻²]	$(2.757 \pm 2.680) \times 10^{-3}$	14053958	6.074×10^{-4}	2.070×10^{-3}	8.501×10^{-4}	5.493×10^{-2}	1.843×10^{-3}	2.451×10^{-3}
ozone slant column density [mol m ⁻²]	0.423 ± 0.196	14053958	0.147	0.369	0.145	1.59	0.302	0.449
ozone slant column precision [mol m ⁻²]	$(2.879 \pm 2.902) \times 10^{-3}$	14053958	6.558×10^{-4}	2.130×10^{-3}	8.561×10^{-4}	6.618×10^{-2}	1.887×10^{-3}	2.543×10^{-3}
number of iterations slant column [1]	3.01 ± 0.18	14053958	0.0	3.00	2.00	7.00	3.00	3.00
root mean square slant column fit [1]	$(1.112 \pm 1.120) \times 10^{-3}$	14053958	2.538×10^{-4}	8.227×10^{-4}	3.208×10^{-4}	2.542×10^{-2}	7.285×10^{-4}	9.822×10^{-4}
fitted radiance shift [nm]	$(-1.610 \pm 2.834) \times 10^{-3}$	14053958	2.030×10^{-3}	-1.819×10^{-3}	-5.348×10^{-2}	7.990×10^{-2}	-2.759×10^{-3}	-7.291×10^{-4}
fitted radiance squeeze [1]	$(1.188 \pm 3.016) \times 10^{-4}$	14053958	2.750×10^{-4}	1.363×10^{-4}	-2.205×10^{-2}	2.179×10^{-2}	-2.881×10^{-6}	2.721×10^{-4}
ozone total air mass factor [1]	3.56 ± 1.75	14053958	1.51	2.95	1.89	12.7	2.40	3.91
ozone effective temperature [K]	240 ± 10	14053958	17.2	239	109	387	231	248
number of iterations vertical column [1]	2.01 ± 0.50	14053958	0.0	2.00	1.000	15.0	2.00	2.00

Table 5: Parameterlist and basic statistics for the analysis for observations over water

Variable	mean $\pm \sigma$	Count	IQR	Median	Minimum	Maximum	25 % percentile	75 % percentile
qa value [1]	0.866 ± 0.223	14305479	0.1000	0.900	0.0	1.000	0.900	1.000
ozone total vertical column [mol m ⁻²]	0.130 ± 0.017	14305479	2.125×10^{-2}	0.127	6.150×10^{-2}	0.256	0.118	0.139
ozone total vertical column precision [mol m ⁻²]	$(3.071 \pm 3.389) \times 10^{-3}$	14305479	6.768×10^{-4}	2.063×10^{-3}	8.547×10^{-4}	7.937×10^{-2}	1.833×10^{-3}	2.509×10^{-3}
ozone slant column density [mol m ⁻²]	0.434 ± 0.231	14305479	0.157	0.354	0.145	1.65	0.292	0.449
ozone slant column precision [mol m ⁻²]	$(3.196 \pm 3.632) \times 10^{-3}$	14305479	7.090×10^{-4}	2.114×10^{-3}	8.578×10^{-4}	6.673×10^{-2}	1.873×10^{-3}	2.582×10^{-3}
number of iterations slant column [1]	3.02 ± 0.22	14305479	0.0	3.00	2.00	10.00	3.00	3.00
root mean square slant column fit [1]	$(1.234 \pm 1.403) \times 10^{-3}$	14305479	2.741×10^{-4}	8.164×10^{-4}	3.257×10^{-4}	2.553×10^{-2}	7.229×10^{-4}	9.970×10^{-4}
fitted radiance shift [nm]	$(-1.139 \pm 3.181) \times 10^{-3}$	14305479	2.444×10^{-3}	-1.362×10^{-3}	-4.223×10^{-2}	7.990×10^{-2}	-2.485×10^{-3}	-4.045×10^{-5}
fitted radiance squeeze [1]	$(1.005 \pm 3.190) \times 10^{-4}$	14305479	2.853×10^{-4}	1.111×10^{-4}	-1.777×10^{-2}	6.483×10^{-3}	-3.077×10^{-5}	2.546×10^{-4}
ozone total air mass factor [1]	3.41 ± 1.71	14305479	1.07	2.79	2.03	12.7	2.41	3.48
ozone effective temperature [K]	233 ± 9	14305479	10.1	232	113	387	228	238
number of iterations vertical column [1]	2.04 ± 0.52	14305479	0.0	2.00	1.000	14.0	2.00	2.00

Variable	mean $\pm \sigma$	Count	IQR	Median	Minimum	Maximum	25 % percentile	75 % percentile
qa value [1]	0.785 ± 0.252	7428355	0.170	0.900	0.0	1.000	0.730	0.900
ozone total vertical column [mol m ⁻²]	0.124 ± 0.020	7428355	2.120×10^{-2}	0.119	9.383×10^{-2}	0.265	0.111	0.132
ozone total vertical column precision [mol m ⁻²]	$(3.797 \pm 4.391) \times 10^{-3}$	7428355	1.109×10^{-3}	2.410×10^{-3}	8.872×10^{-4}	5.577×10^{-2}	2.063×10^{-3}	3.172×10^{-3}
ozone slant column density [mol m ⁻²]	0.523 ± 0.267	7428355	0.247	0.430	0.231	1.77	0.353	0.600
ozone slant column precision [mol m ⁻²]	$(4.001 \pm 4.724) \times 10^{-3}$	7428355	1.193×10^{-3}	2.511×10^{-3}	8.921×10^{-4}	6.123×10^{-2}	2.135×10^{-3}	3.328×10^{-3}
number of iterations slant column [1]	3.05 ± 0.27	7428355	0.0	3.00	2.00	8.00	3.00	3.00
root mean square slant column fit [1]	$(1.546 \pm 1.824) \times 10^{-3}$	7428355	4.612×10^{-4}	9.703×10^{-4}	3.479×10^{-4}	2.365×10^{-2}	8.252×10^{-4}	1.286×10^{-3}
fitted radiance shift [nm]	$(-1.315 \pm 3.235) \times 10^{-3}$	7428355	2.038×10^{-3}	-1.856×10^{-3}	-5.348×10^{-2}	4.287×10^{-2}	-2.694×10^{-3}	-6.551×10^{-4}
fitted radiance squeeze [1]	$(1.482 \pm 3.546) \times 10^{-4}$	7428355	3.098×10^{-4}	1.732×10^{-4}	-2.205×10^{-2}	2.179×10^{-2}	1.191×10^{-5}	3.217×10^{-4}
ozone total air mass factor [1]	4.33 ± 1.79	7428355	1.98	3.87	1.99	12.0	3.09	5.08
ozone effective temperature [K]	240 ± 11	7428355	19.8	244	109	329	230	250
number of iterations vertical column [1]	2.07 ± 0.56	7428355	0.0	2.00	1.000	15.0	2.00	2.00

3 Granule outlines

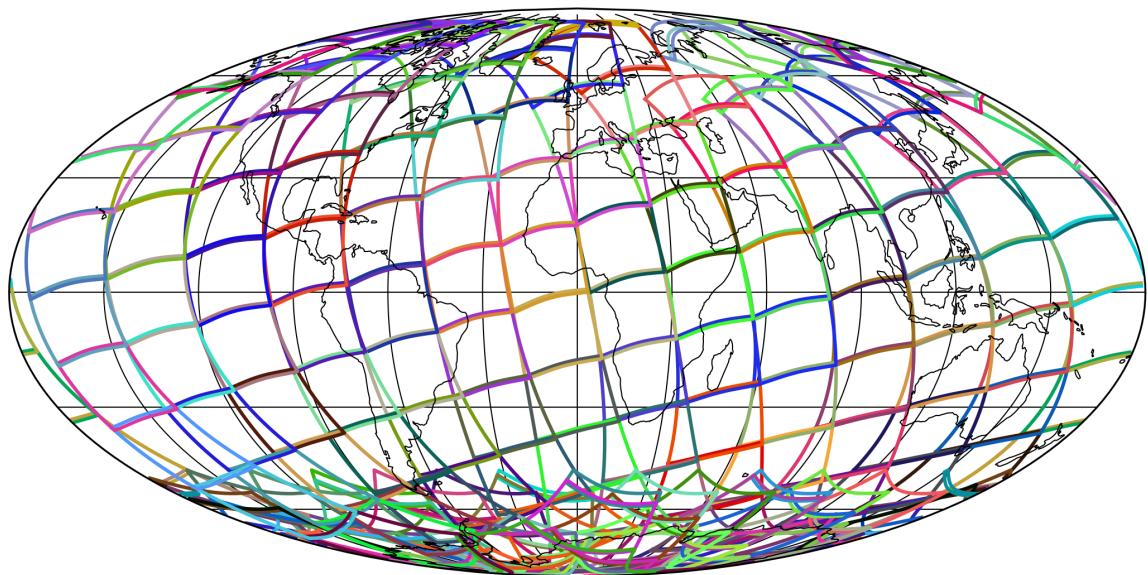


Figure 1: Outline of the granules.

4 Input data monitoring

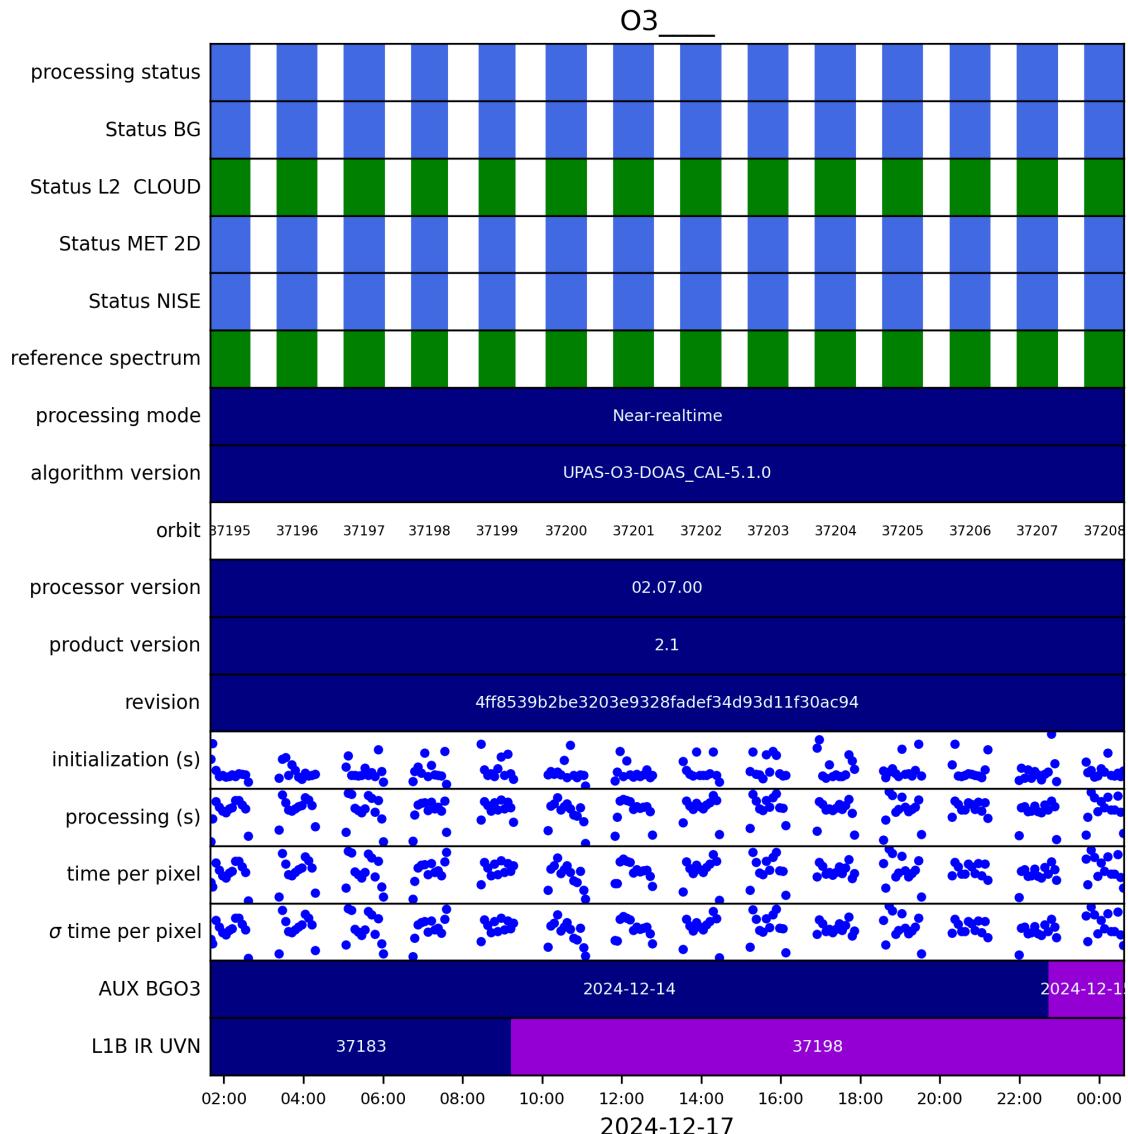


Figure 2: Input data per granule

5 Warnings and errors

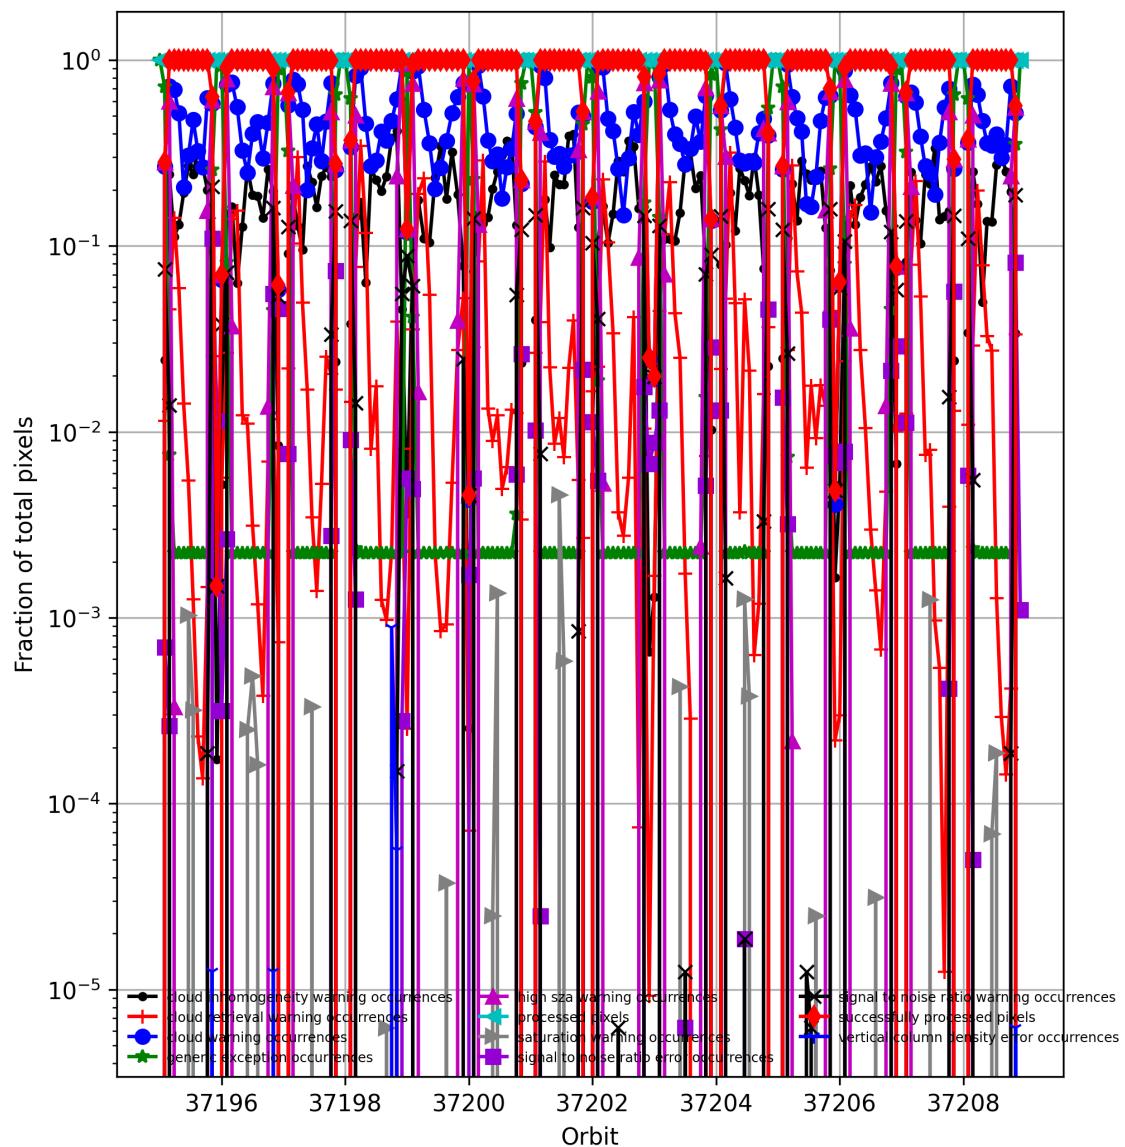


Figure 3: Fraction of pixels with specific warnings and errors during processing

6 World maps

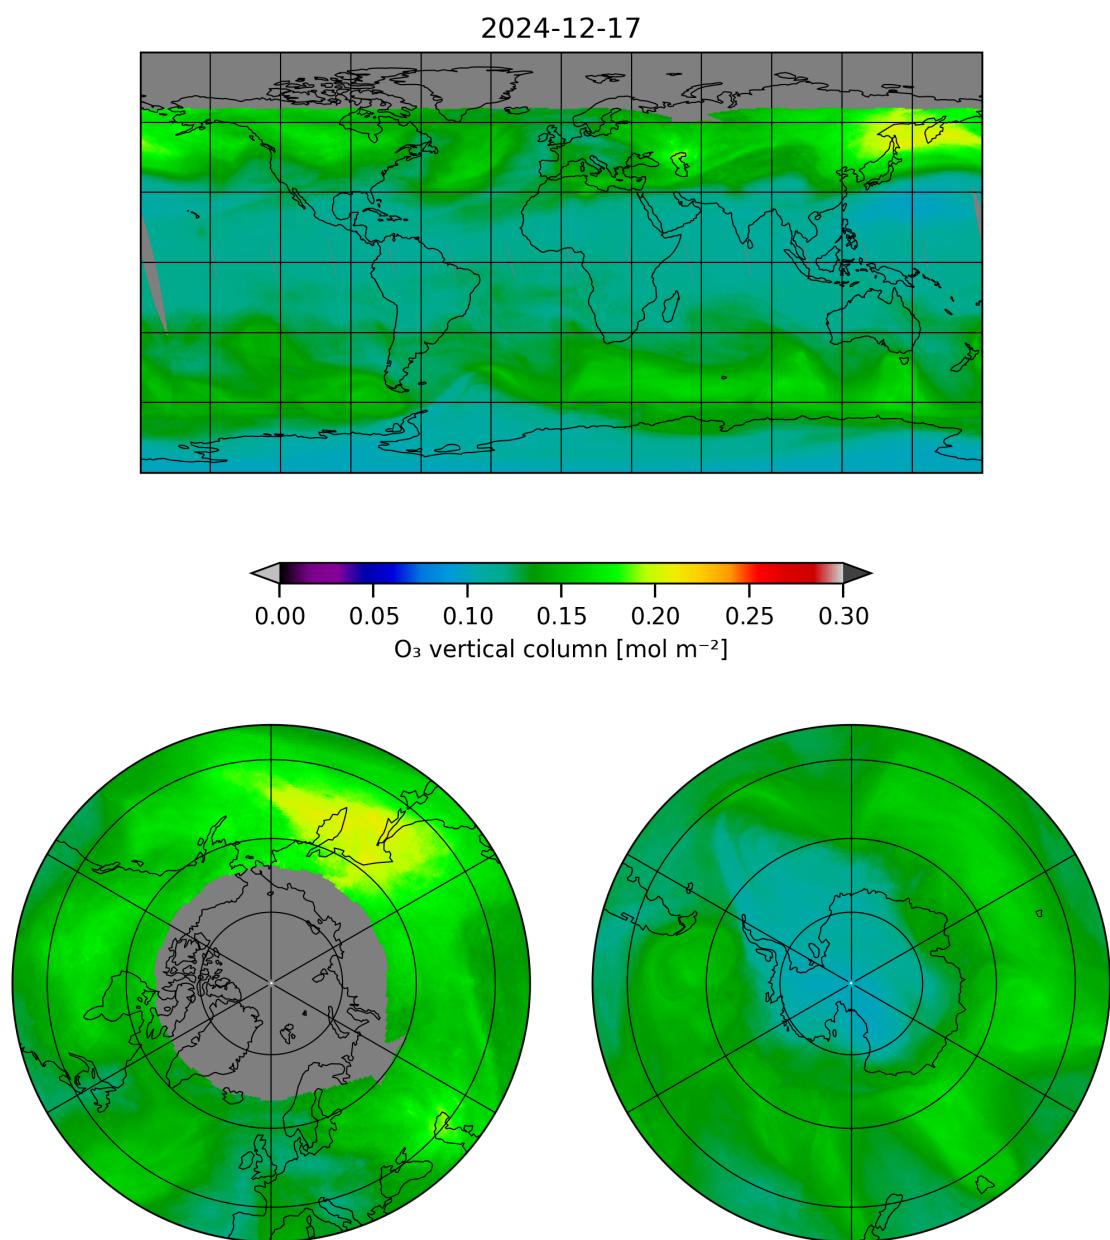


Figure 4: Map of “O₃ vertical column” for 2024-12-17 to 2024-12-18

2024-12-17

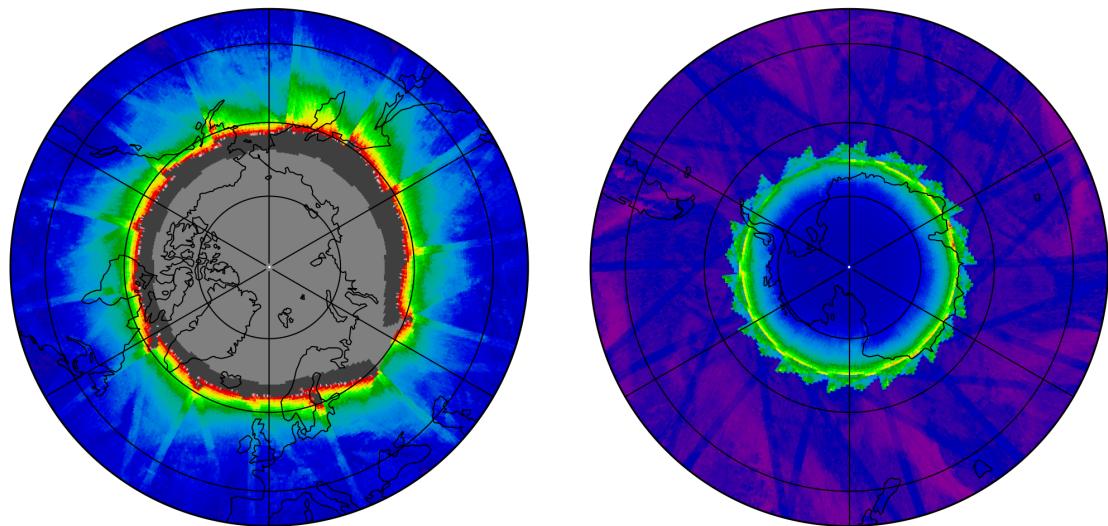
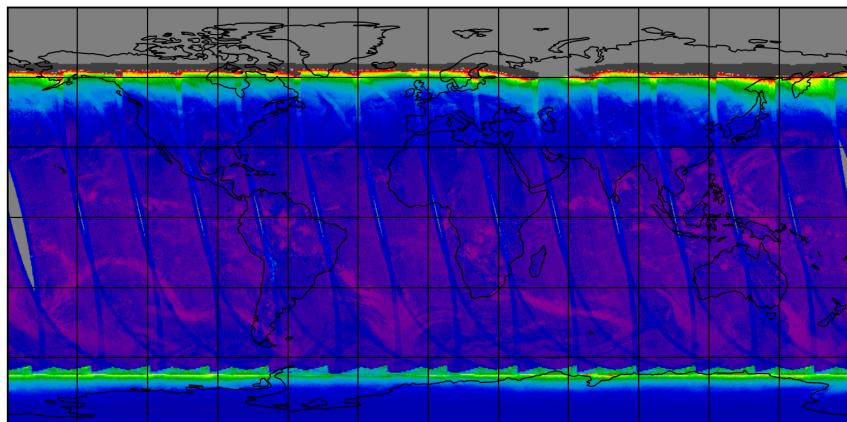


Figure 5: Map of “O₃ vertical column precision” for 2024-12-17 to 2024-12-18

2024-12-17

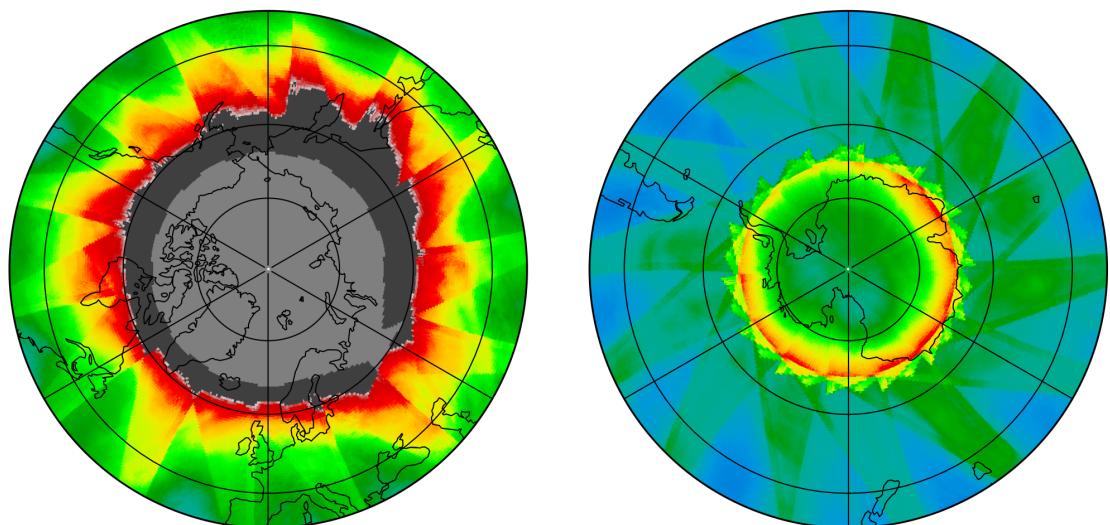
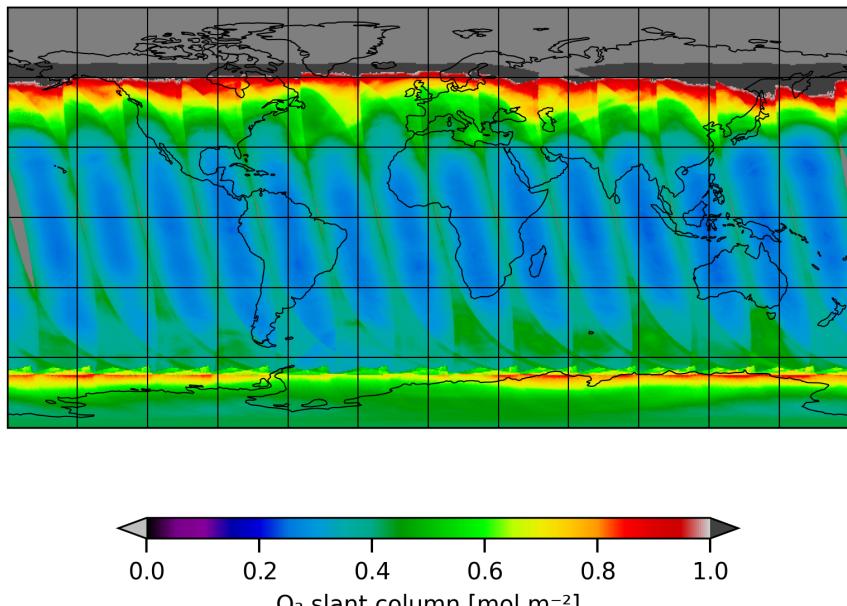


Figure 6: Map of “O₃ slant column” for 2024-12-17 to 2024-12-18

2024-12-17

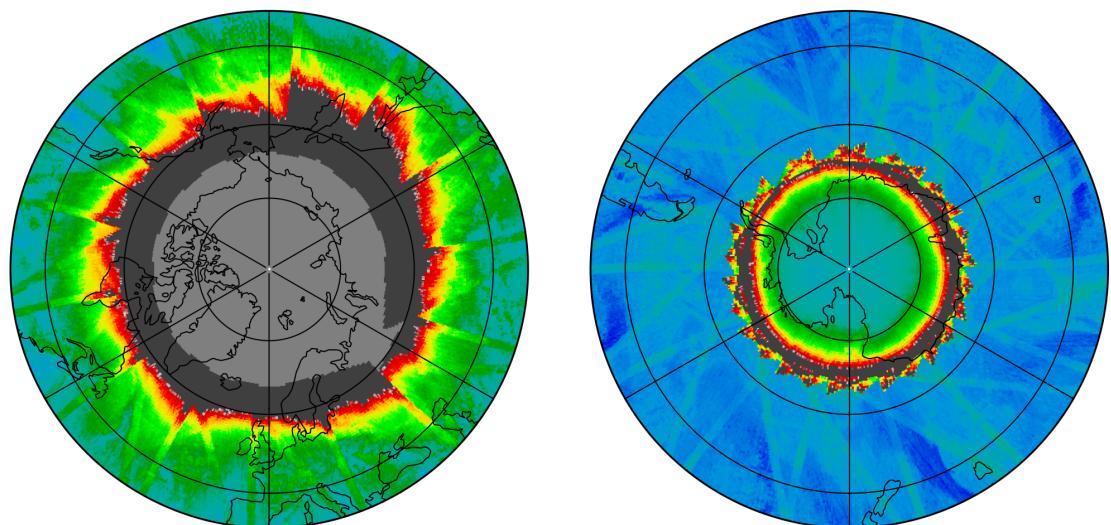
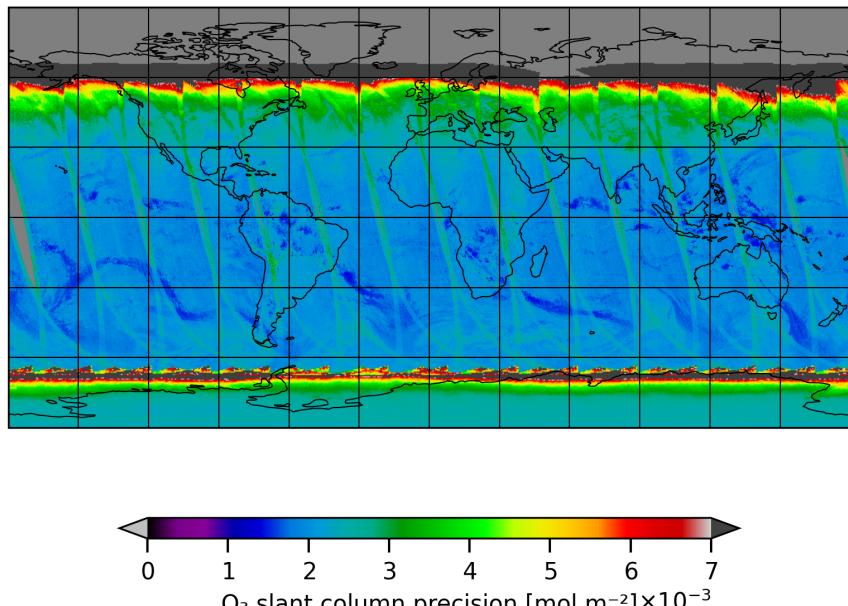


Figure 7: Map of “O₃ slant column precision” for 2024-12-17 to 2024-12-18

2024-12-17

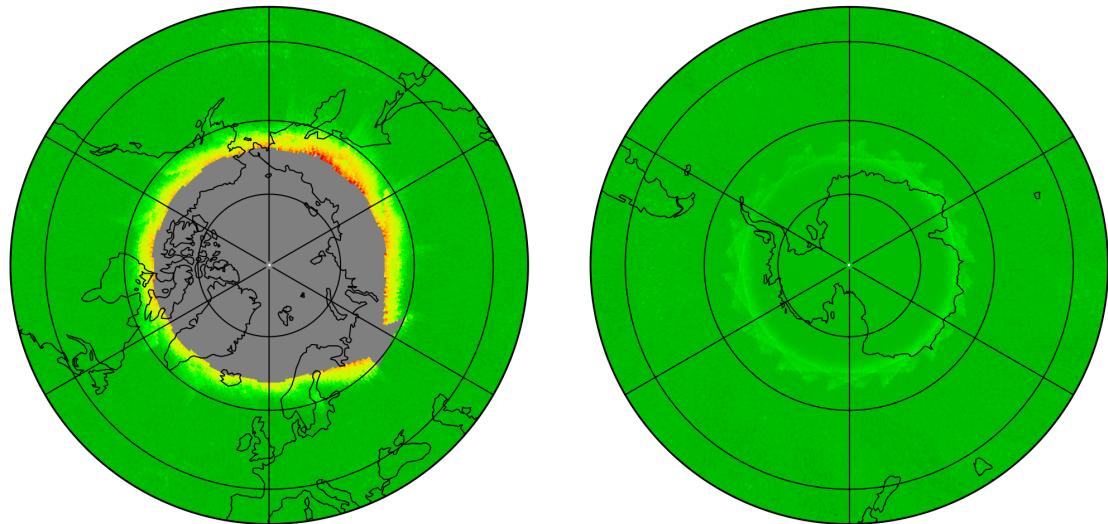

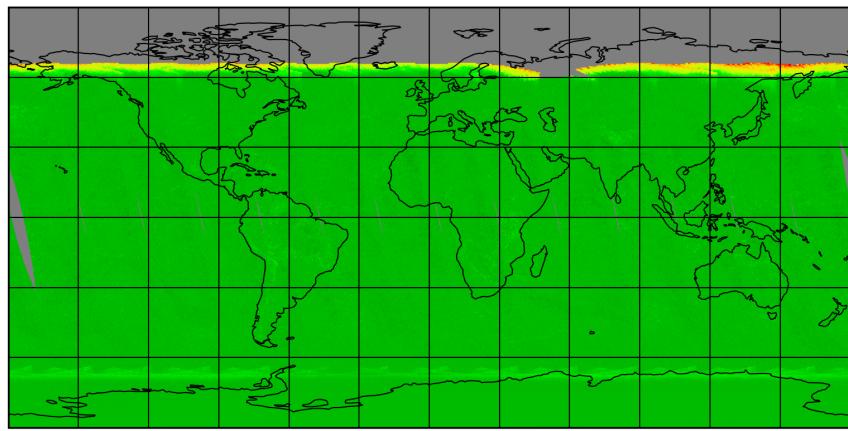


Figure 8: Map of “Number of iterations for slant column retrieval” for 2024-12-17 to 2024-12-18

2024-12-17

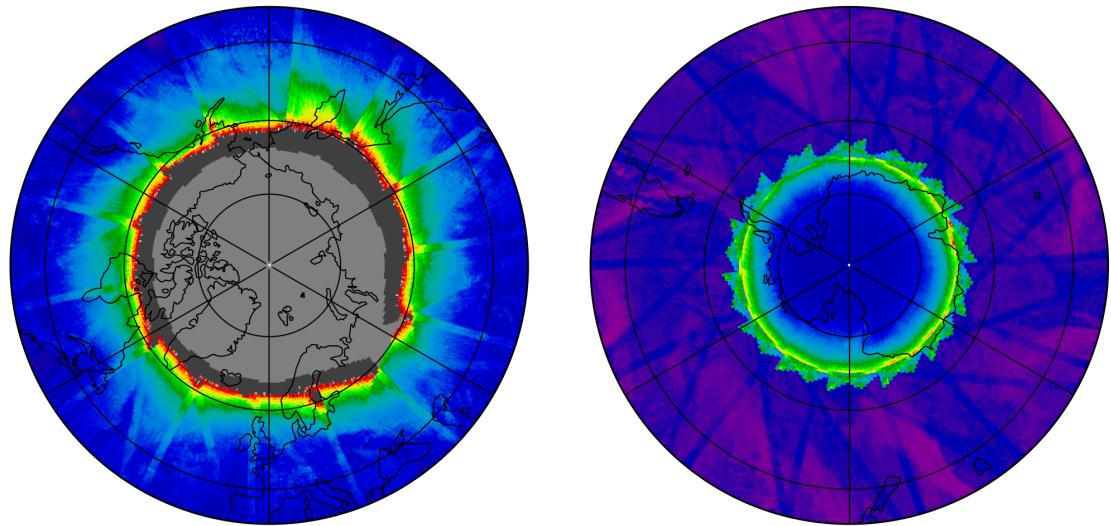

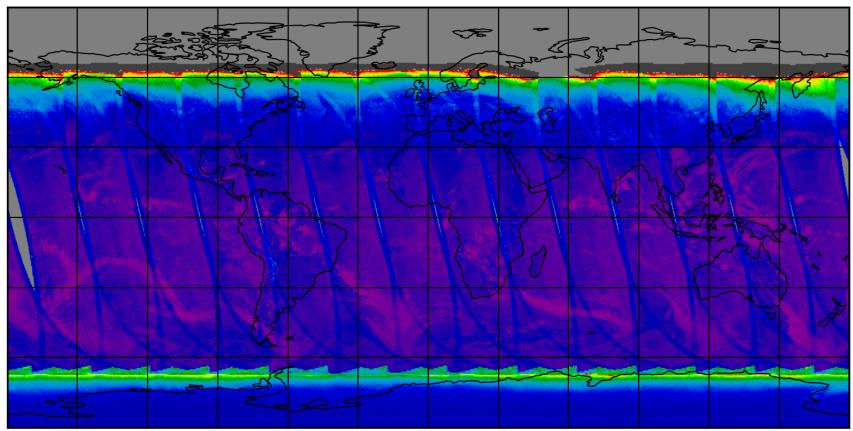


Figure 9: Map of “Fitting RMS” for 2024-12-17 to 2024-12-18

2024-12-17

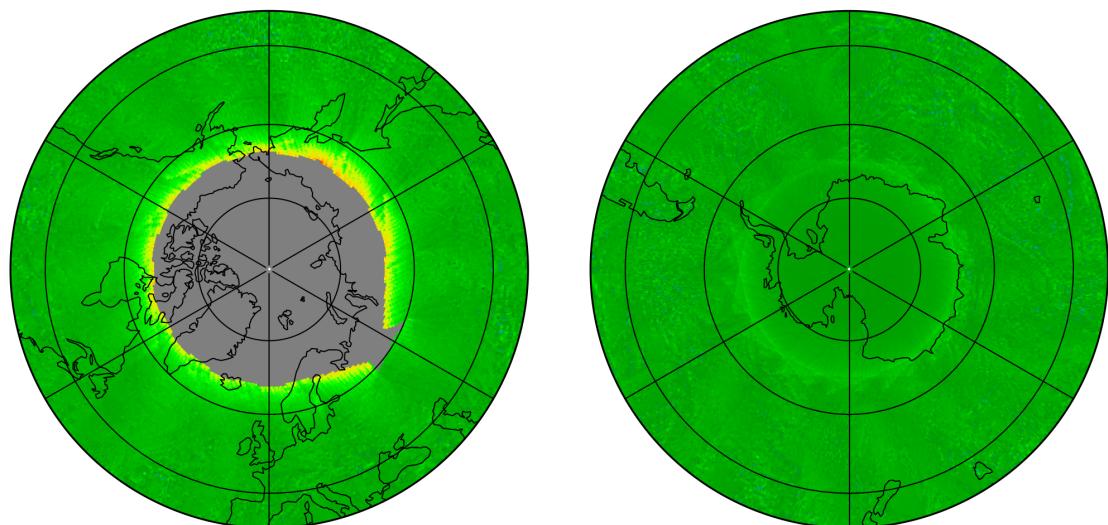

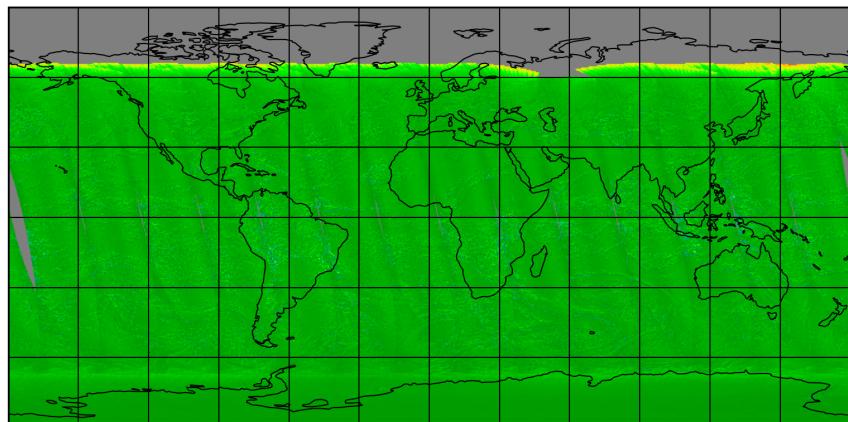


Figure 10: Map of “DOAS fit wavelength shift” for 2024-12-17 to 2024-12-18

2024-12-17

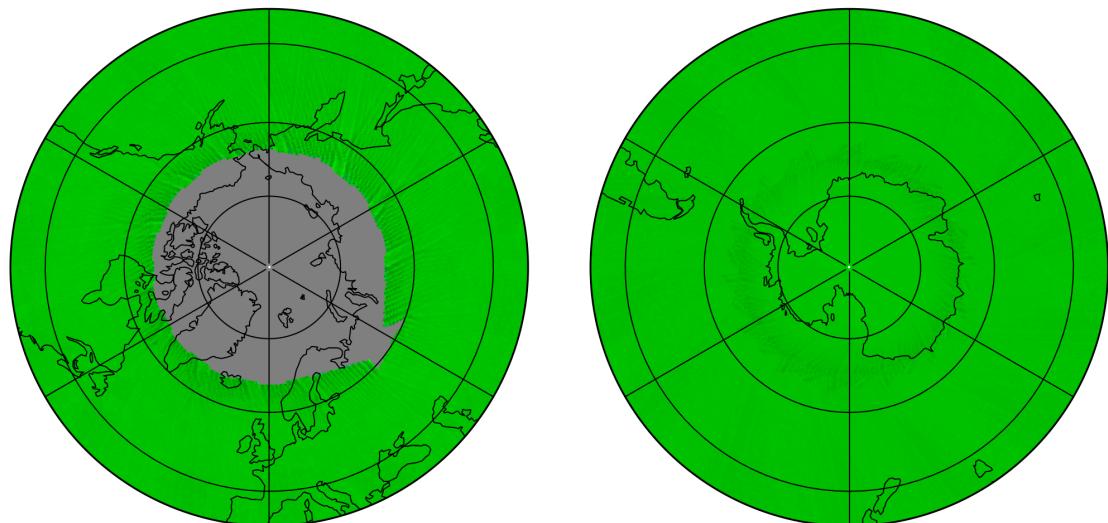
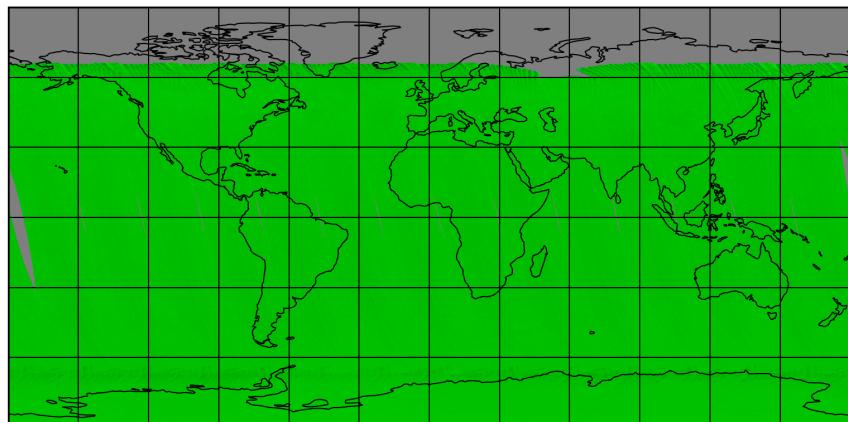


Figure 11: Map of “DOAS fit wavelength squeeze” for 2024-12-17 to 2024-12-18

2024-12-17

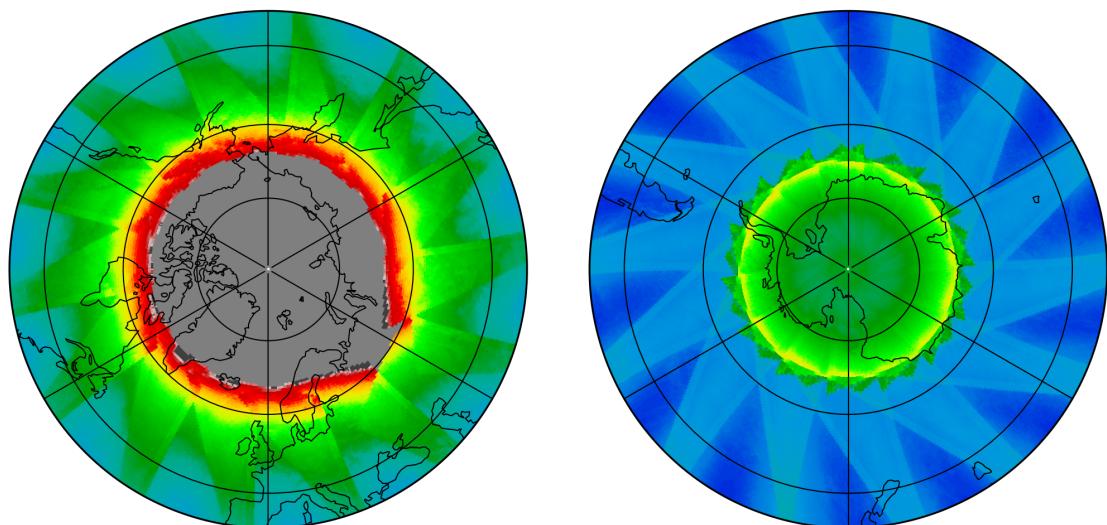
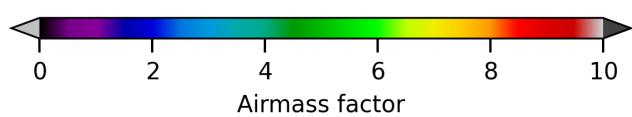
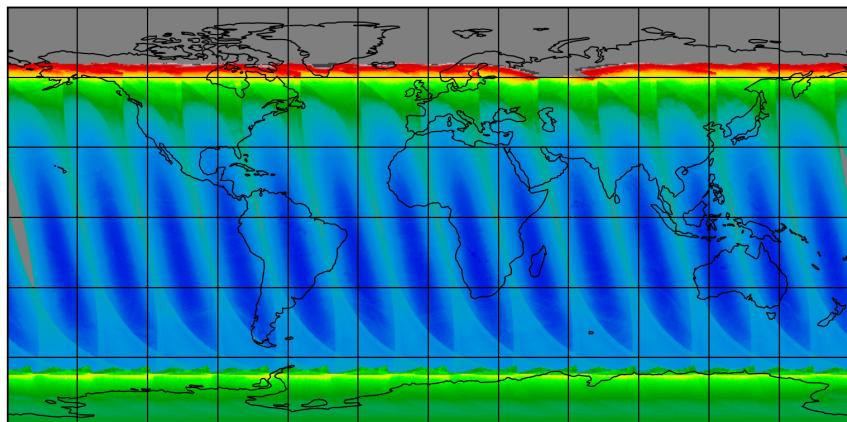


Figure 12: Map of “Airmass factor” for 2024-12-17 to 2024-12-18

2024-12-17

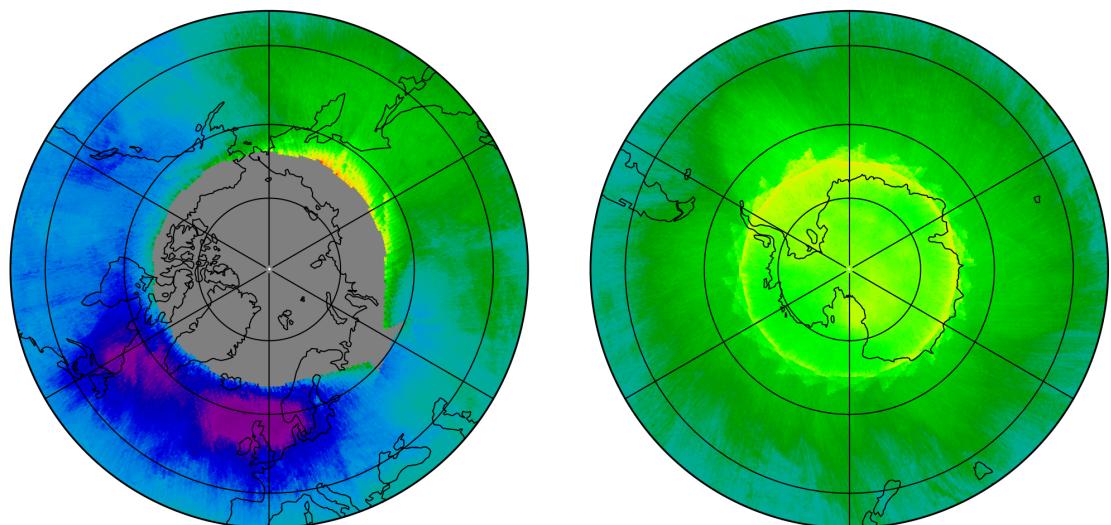

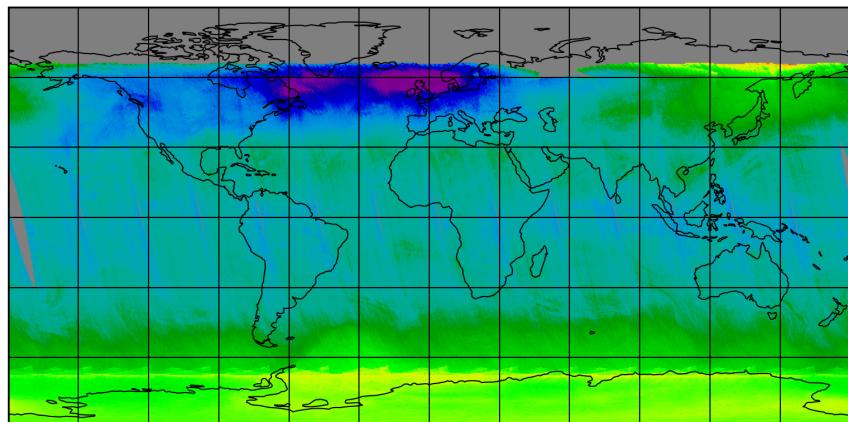


Figure 13: Map of “Effective temperature” for 2024-12-17 to 2024-12-18

2024-12-17

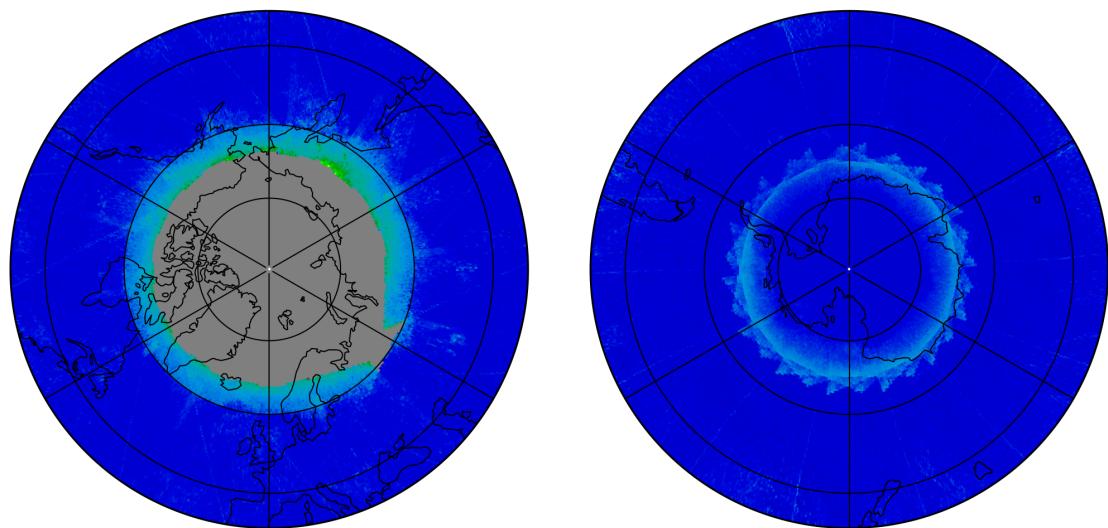
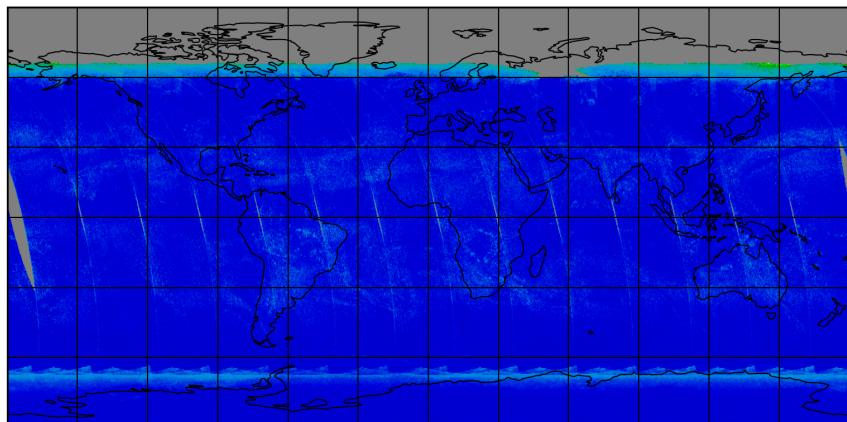


Figure 14: Map of “Number of iterations for vertical column retrieval” for 2024-12-17 to 2024-12-18

2024-12-17

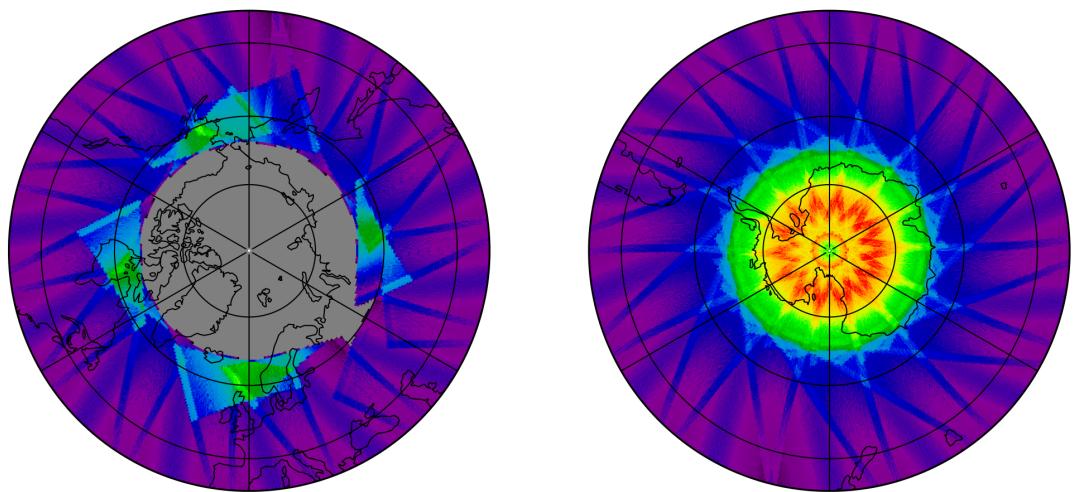

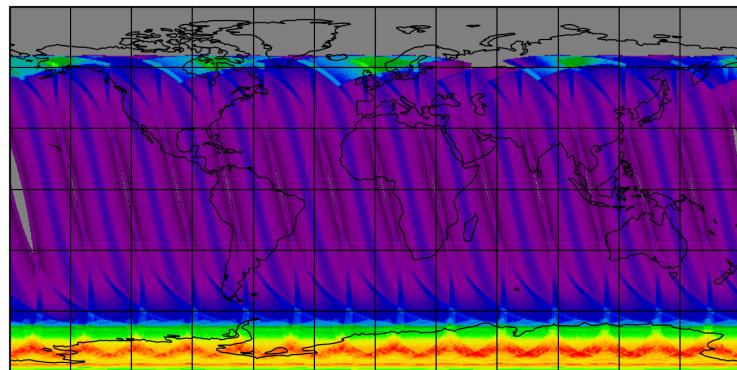


Figure 15: Map of the number of observations for 2024-12-17 to 2024-12-18

7 Zonal average

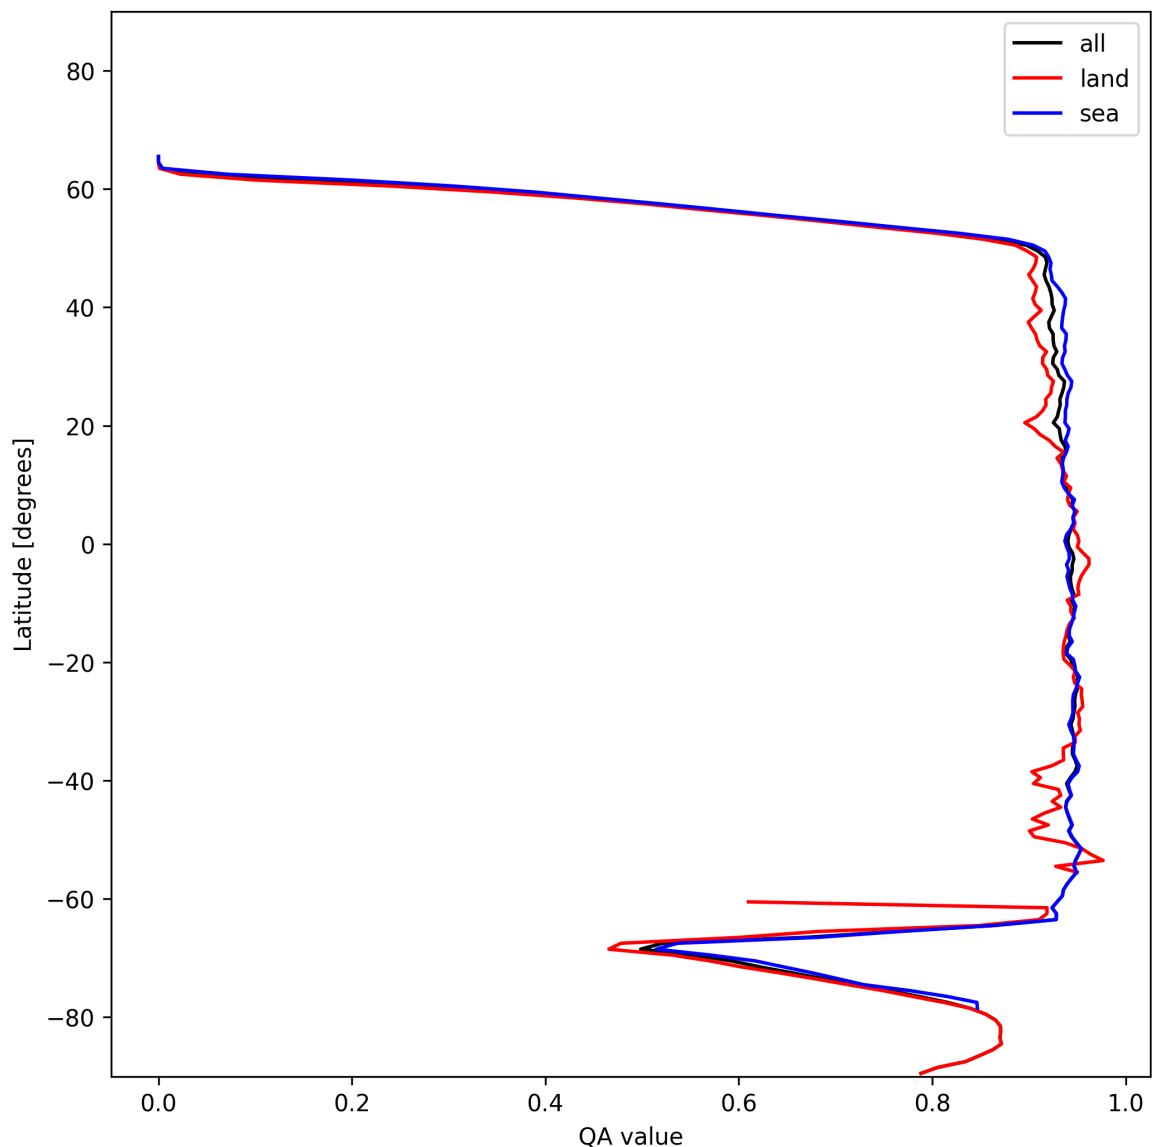


Figure 16: Zonal average of “QA value” for 2024-12-17 to 2024-12-18.

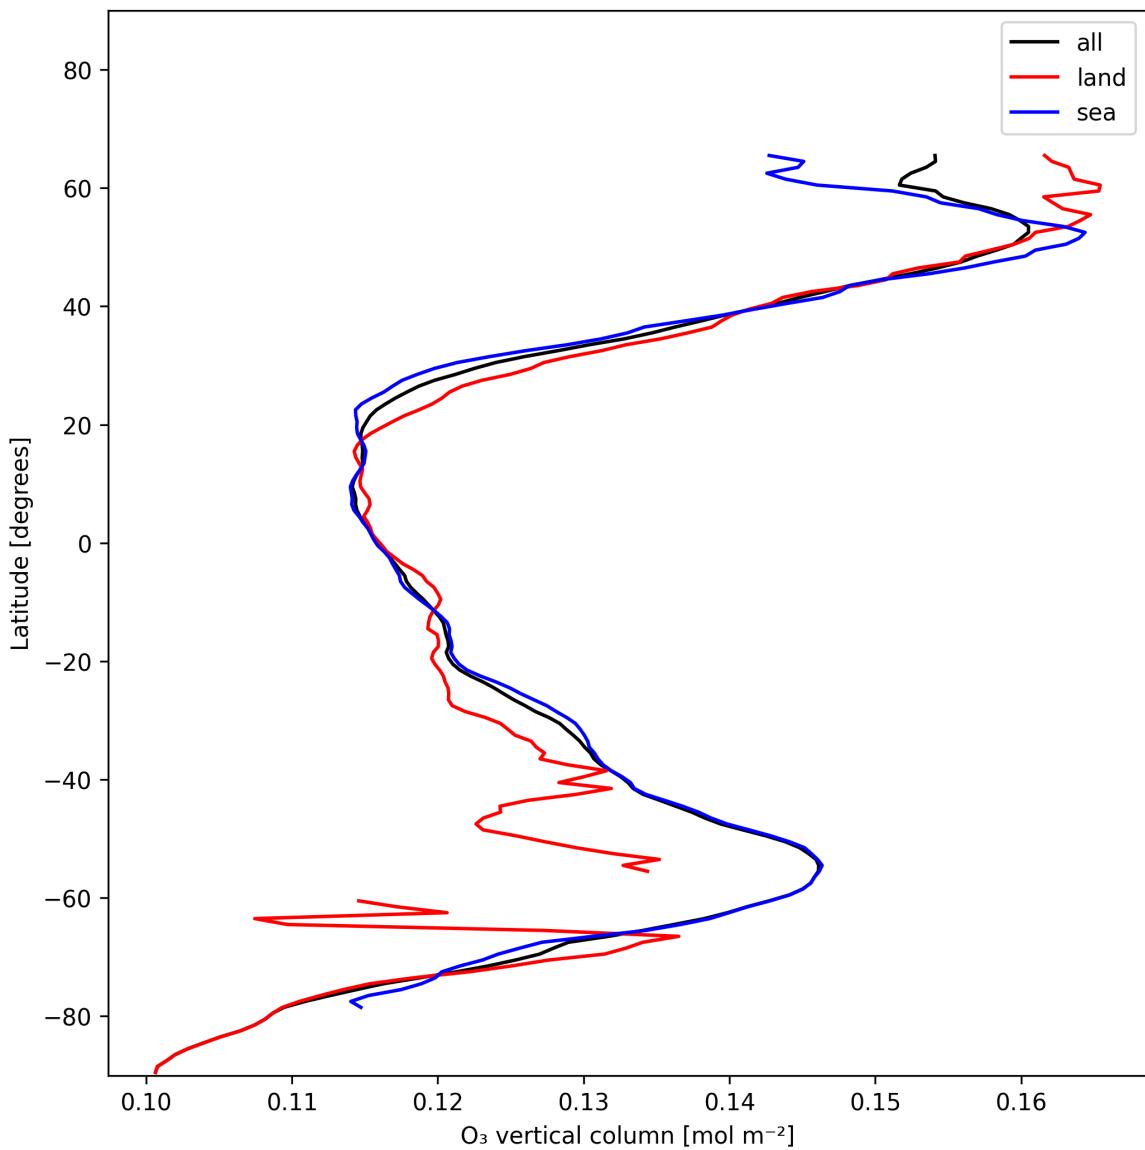


Figure 17: Zonal average of “O₃ vertical column” for 2024-12-17 to 2024-12-18.

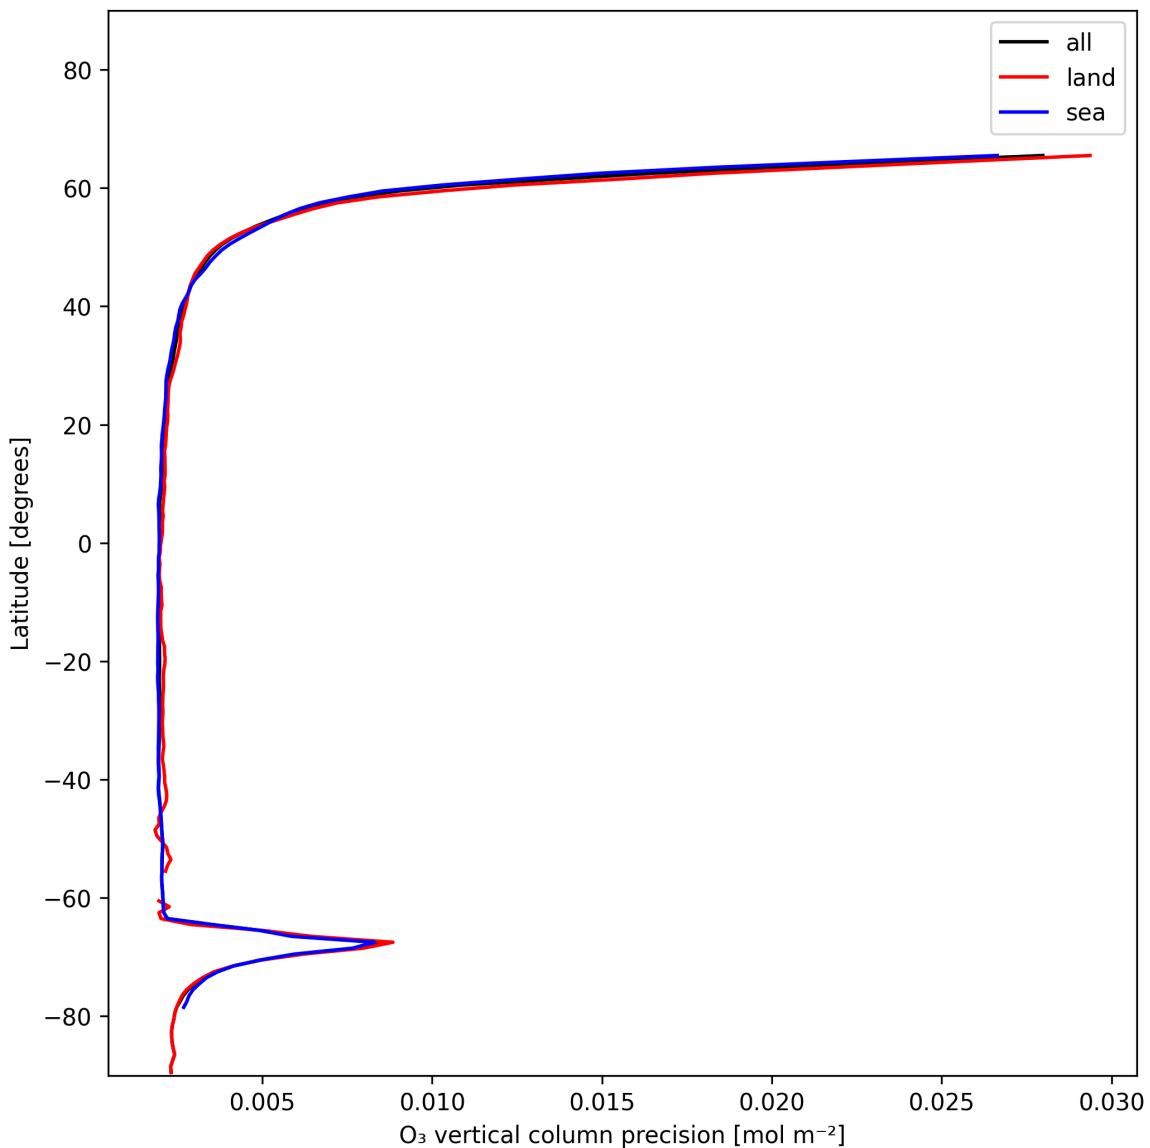


Figure 18: Zonal average of “O₃ vertical column precision” for 2024-12-17 to 2024-12-18.

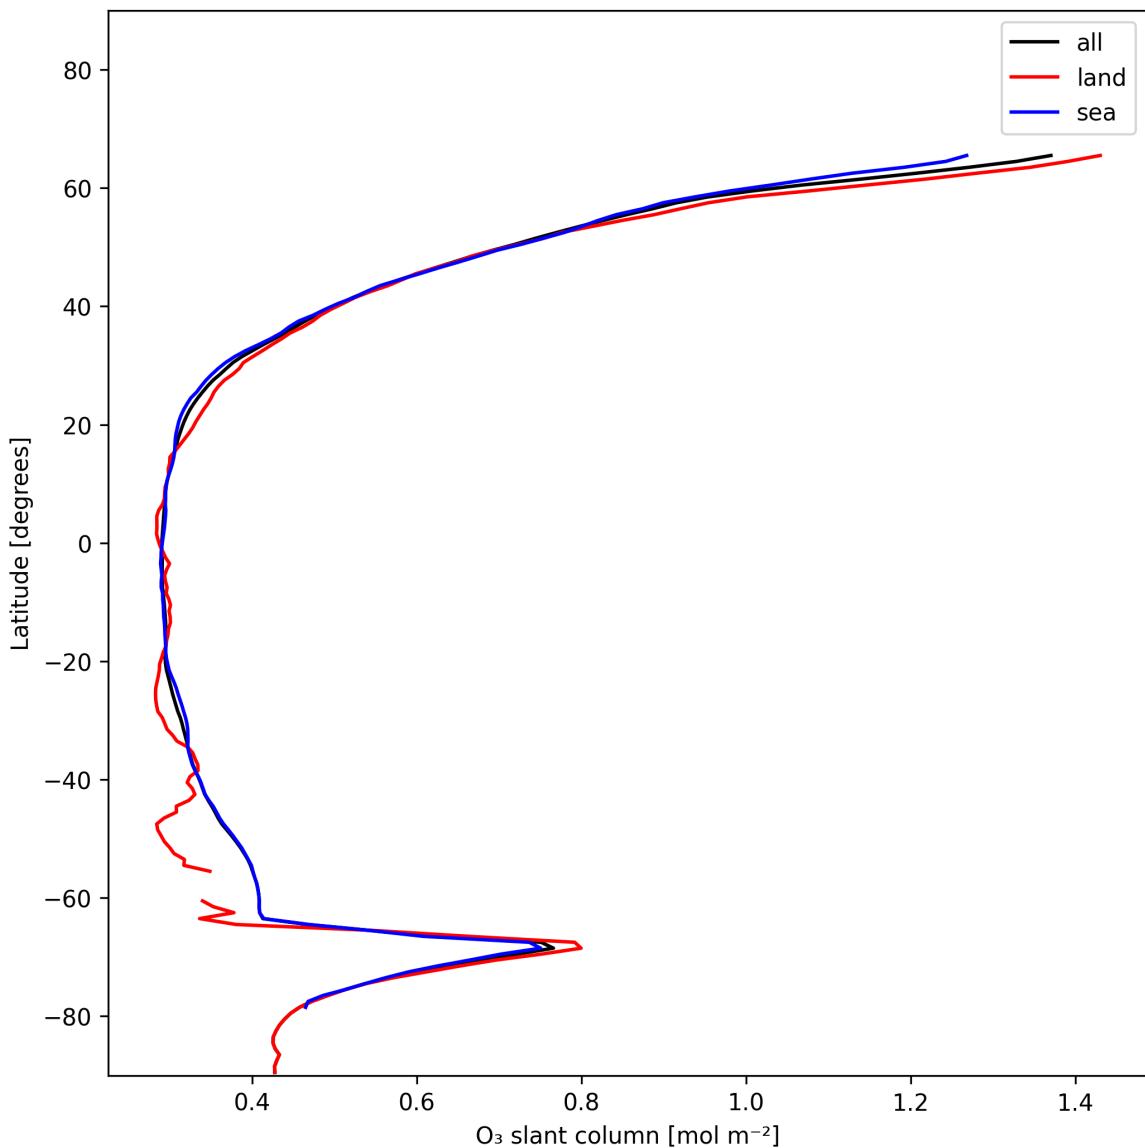


Figure 19: Zonal average of “O₃ slant column” for 2024-12-17 to 2024-12-18.

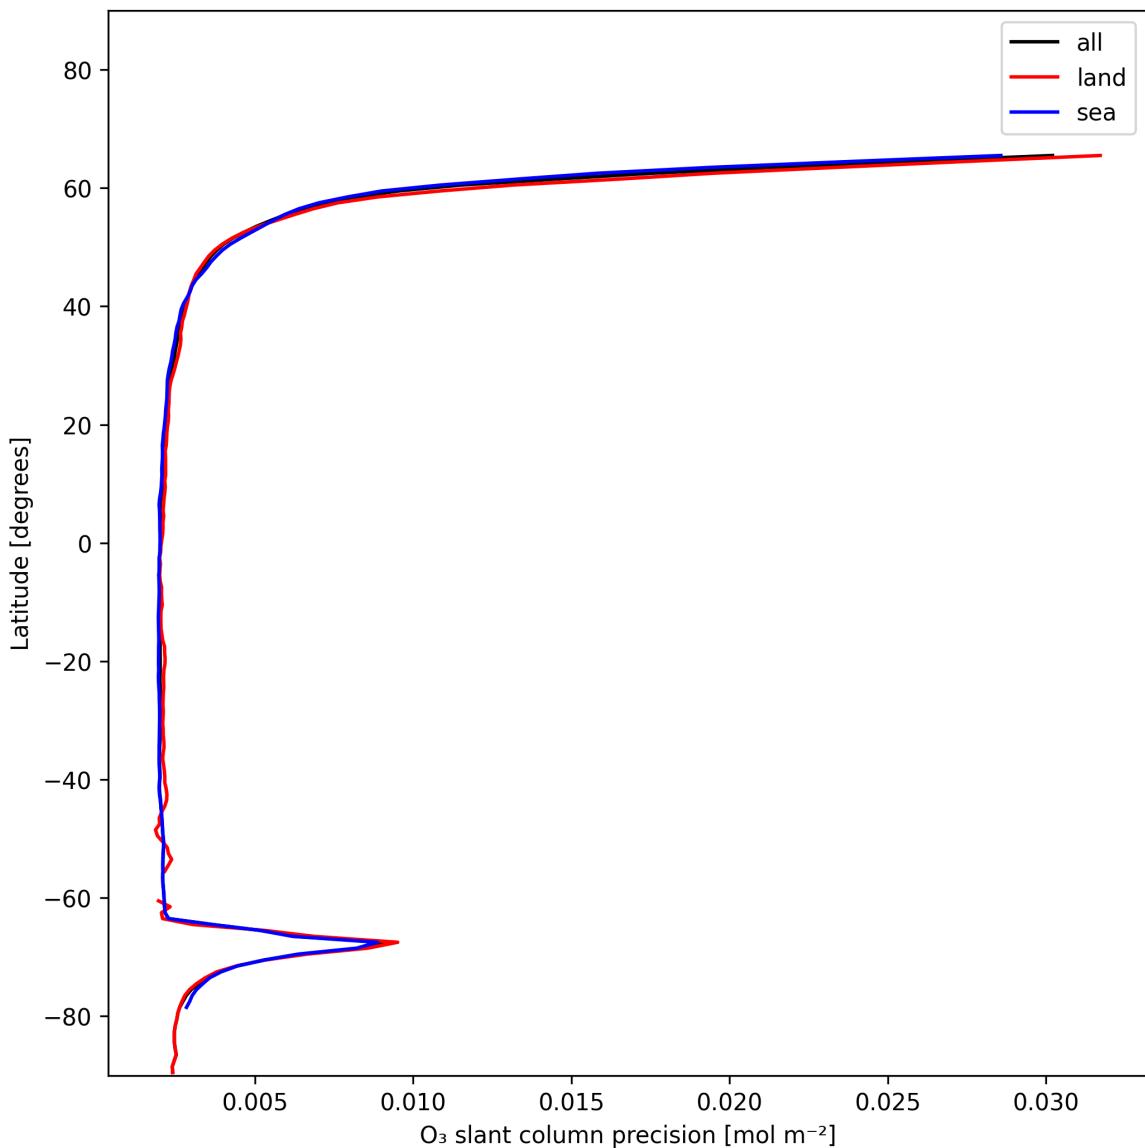


Figure 20: Zonal average of “O₃ slant column precision” for 2024-12-17 to 2024-12-18.

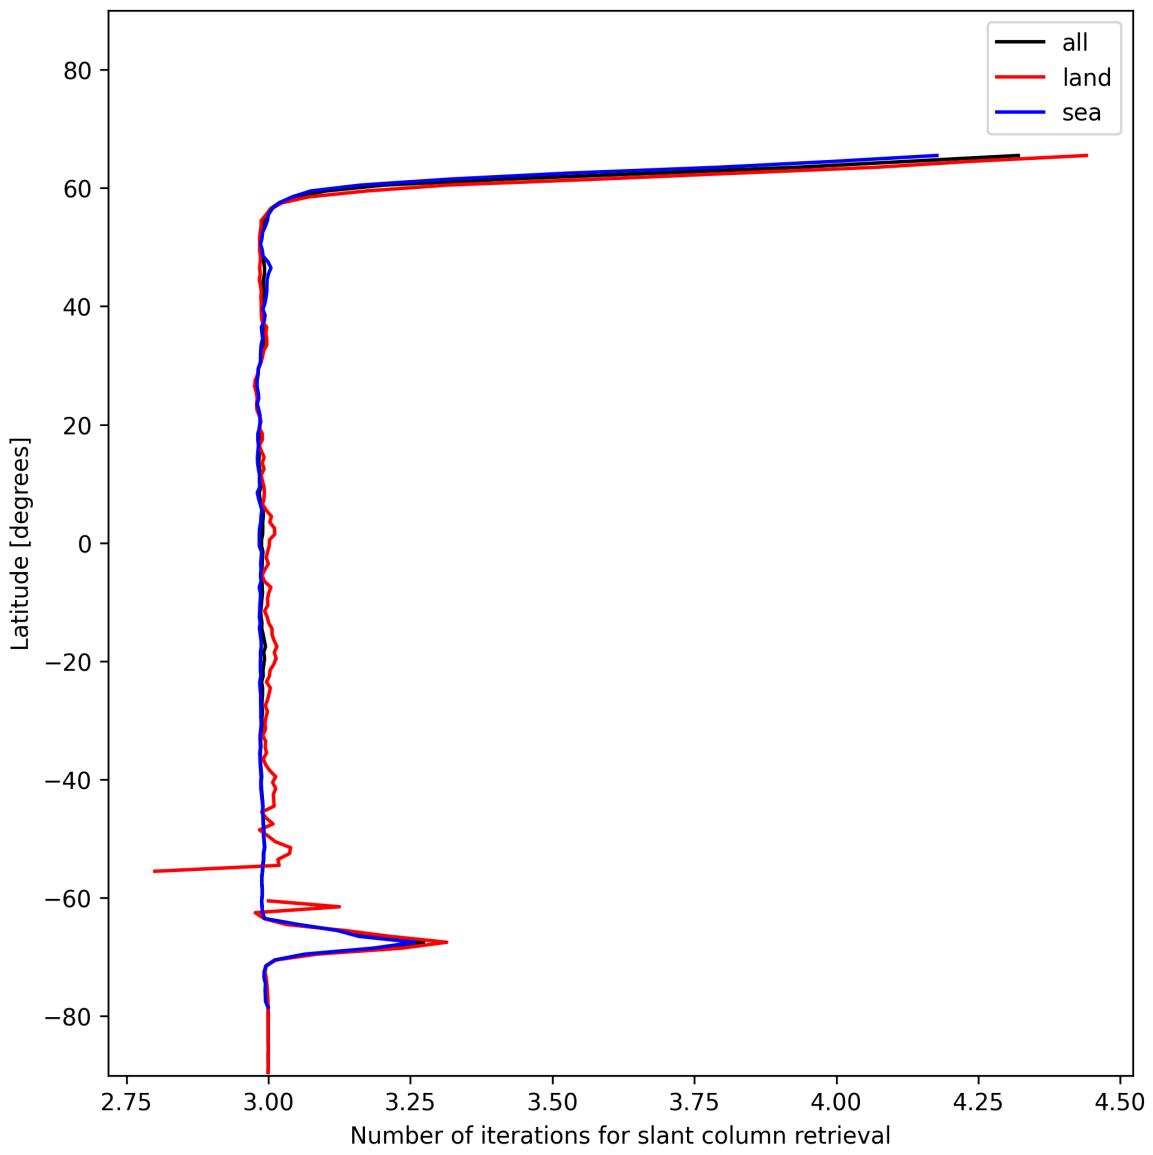


Figure 21: Zonal average of “Number of iterations for slant column retrieval” for 2024-12-17 to 2024-12-18.

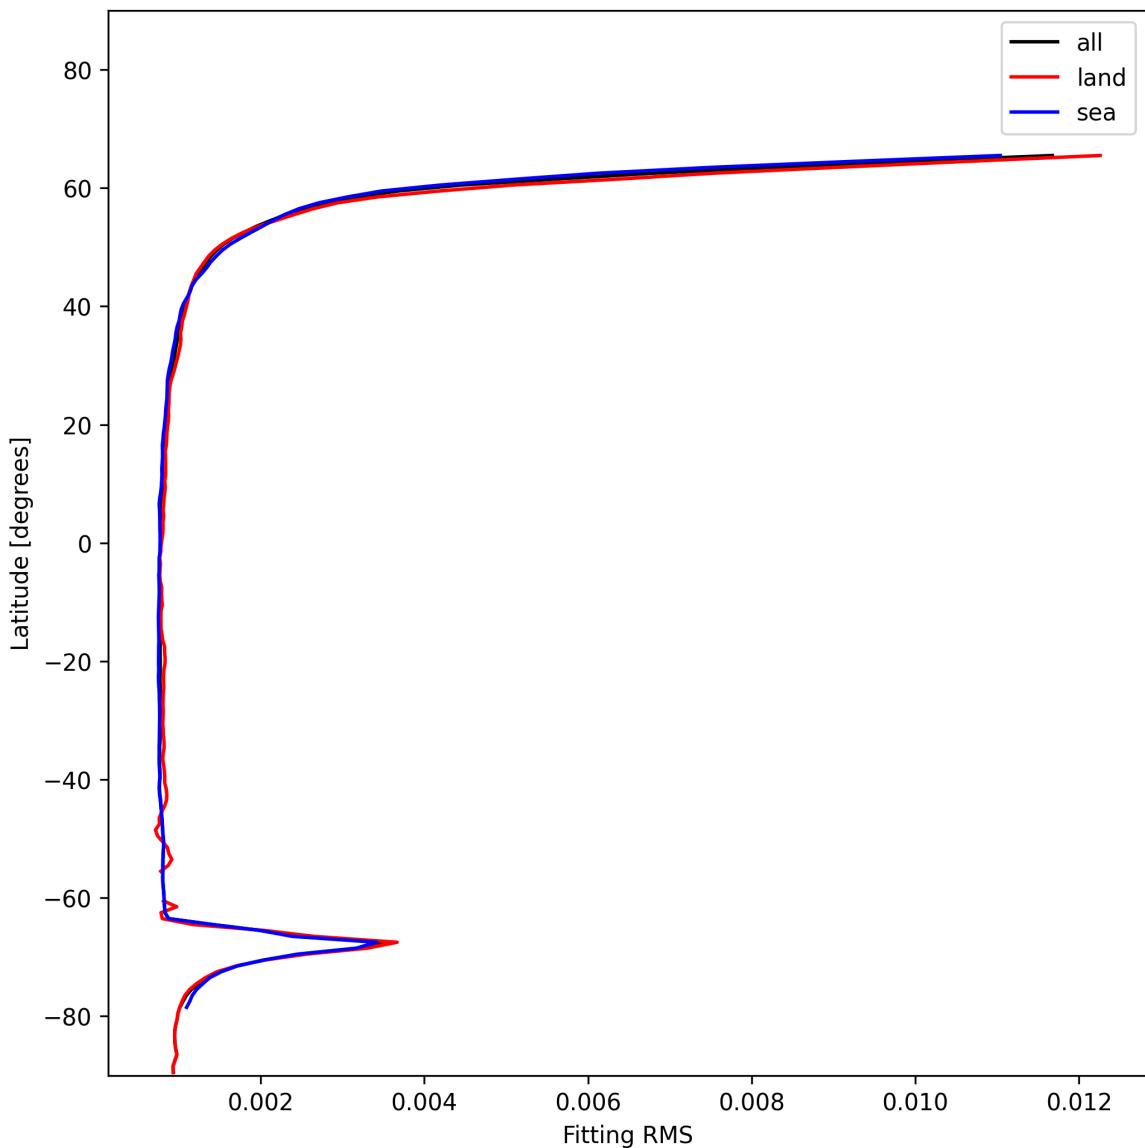


Figure 22: Zonal average of “Fitting RMS” for 2024-12-17 to 2024-12-18.

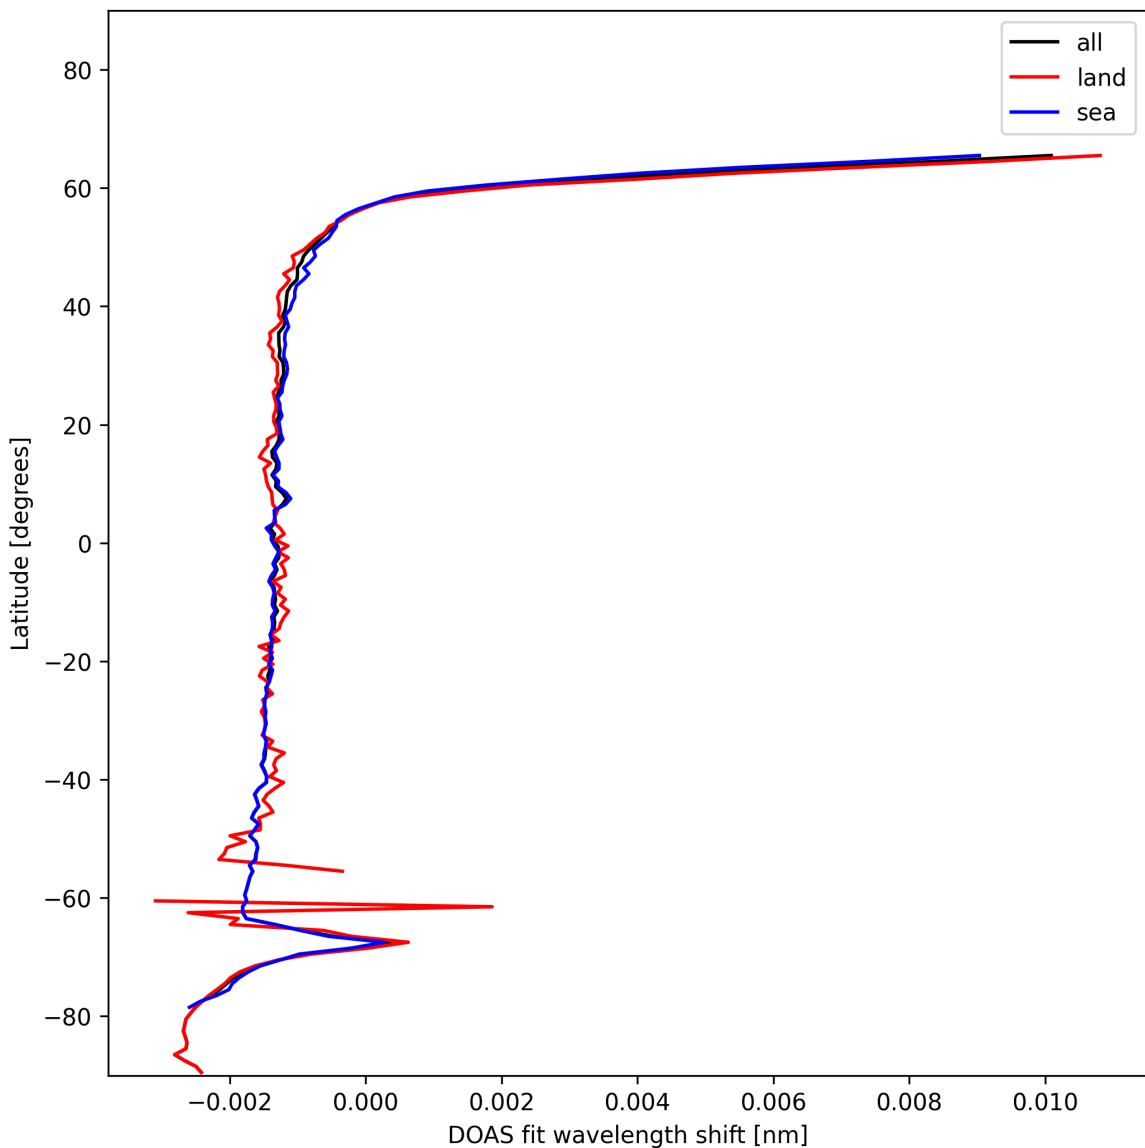


Figure 23: Zonal average of “DOAS fit wavelength shift” for 2024-12-17 to 2024-12-18.

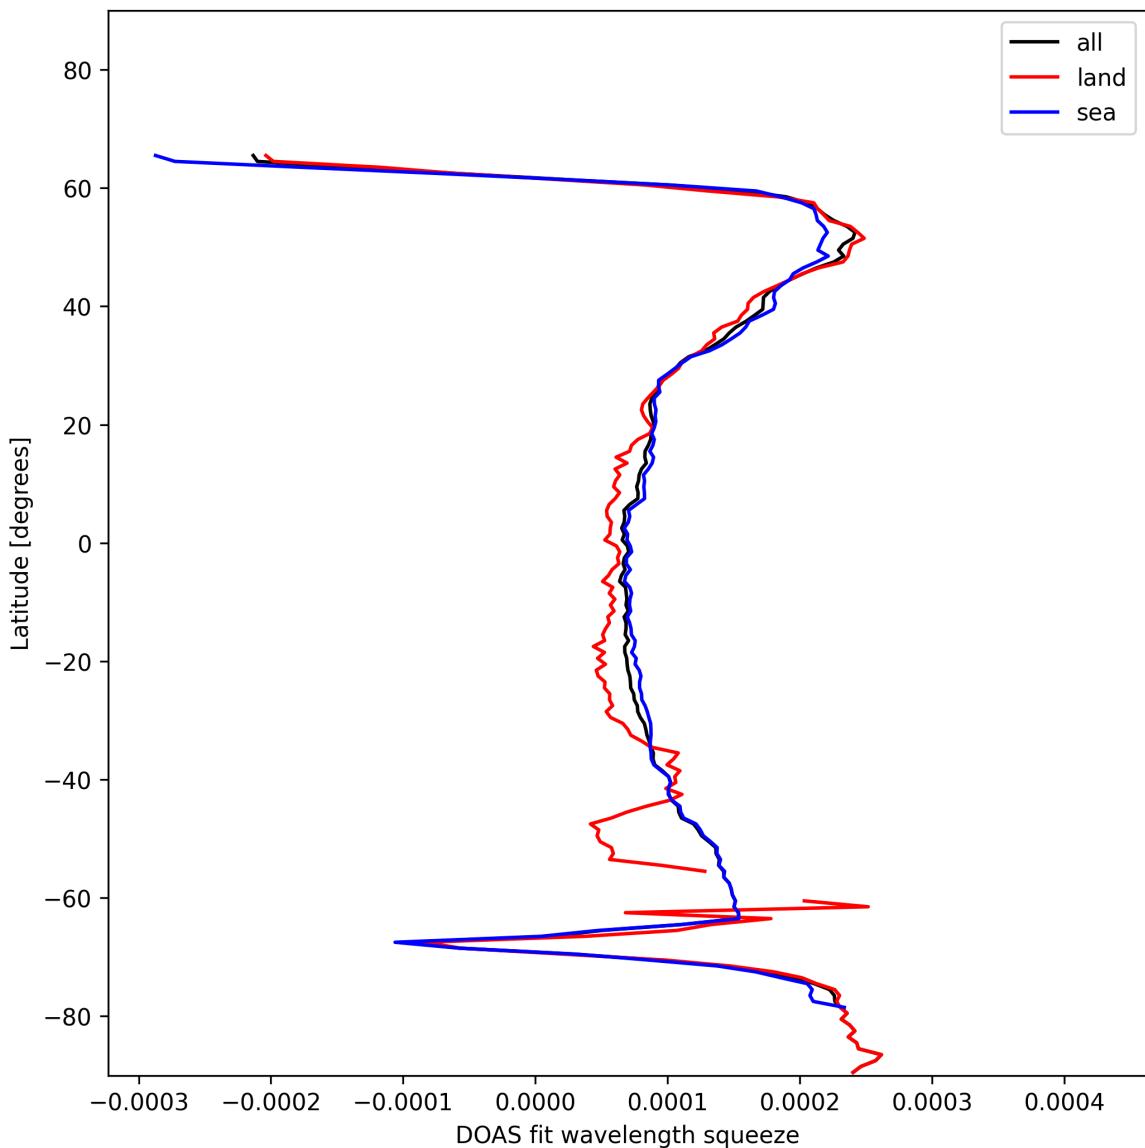


Figure 24: Zonal average of “DOAS fit wavelength squeeze” for 2024-12-17 to 2024-12-18.

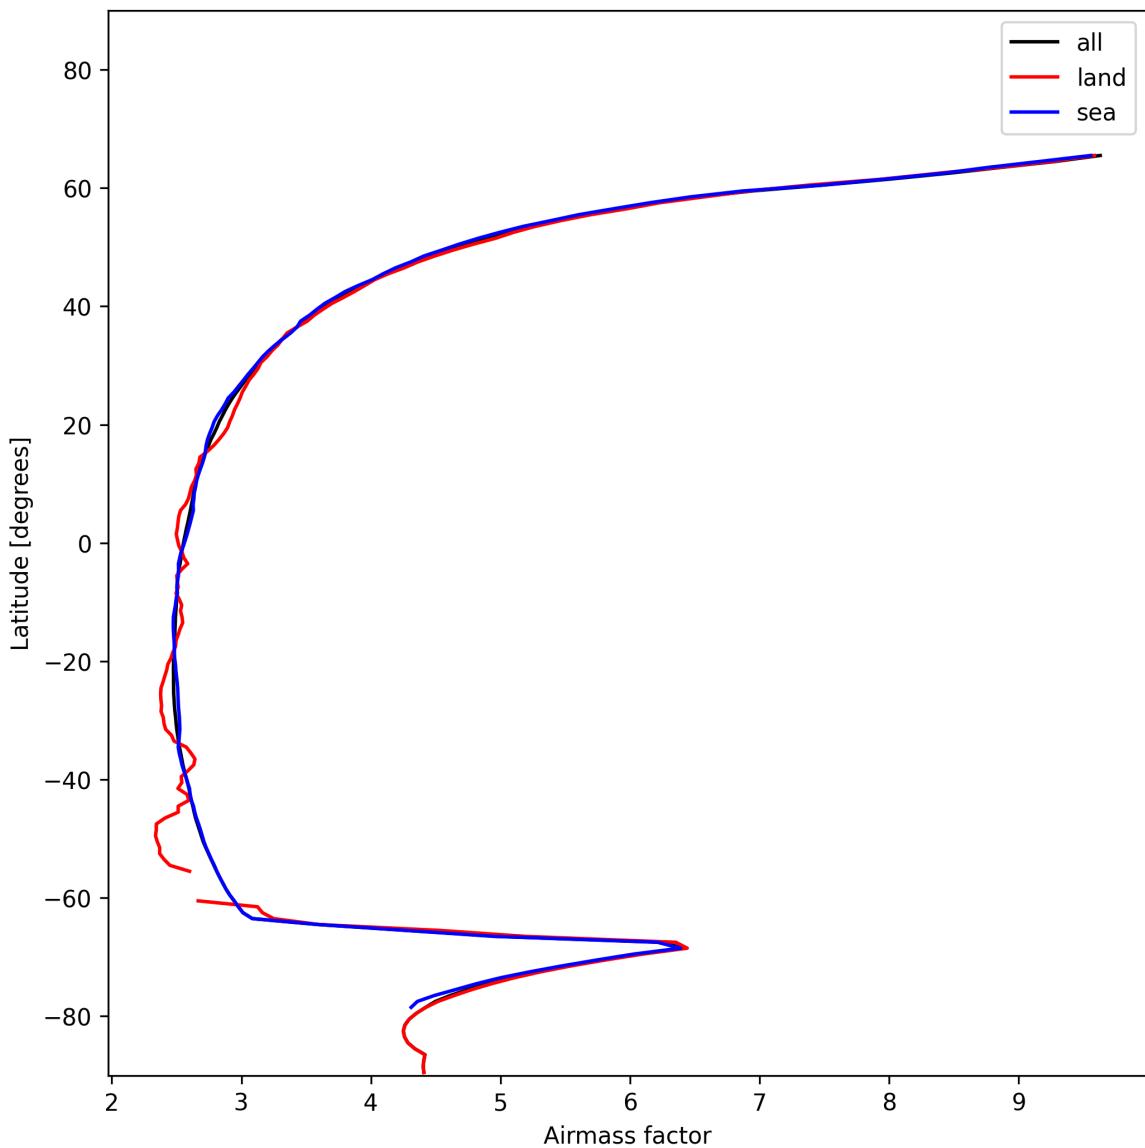


Figure 25: Zonal average of “Airmass factor” for 2024-12-17 to 2024-12-18.

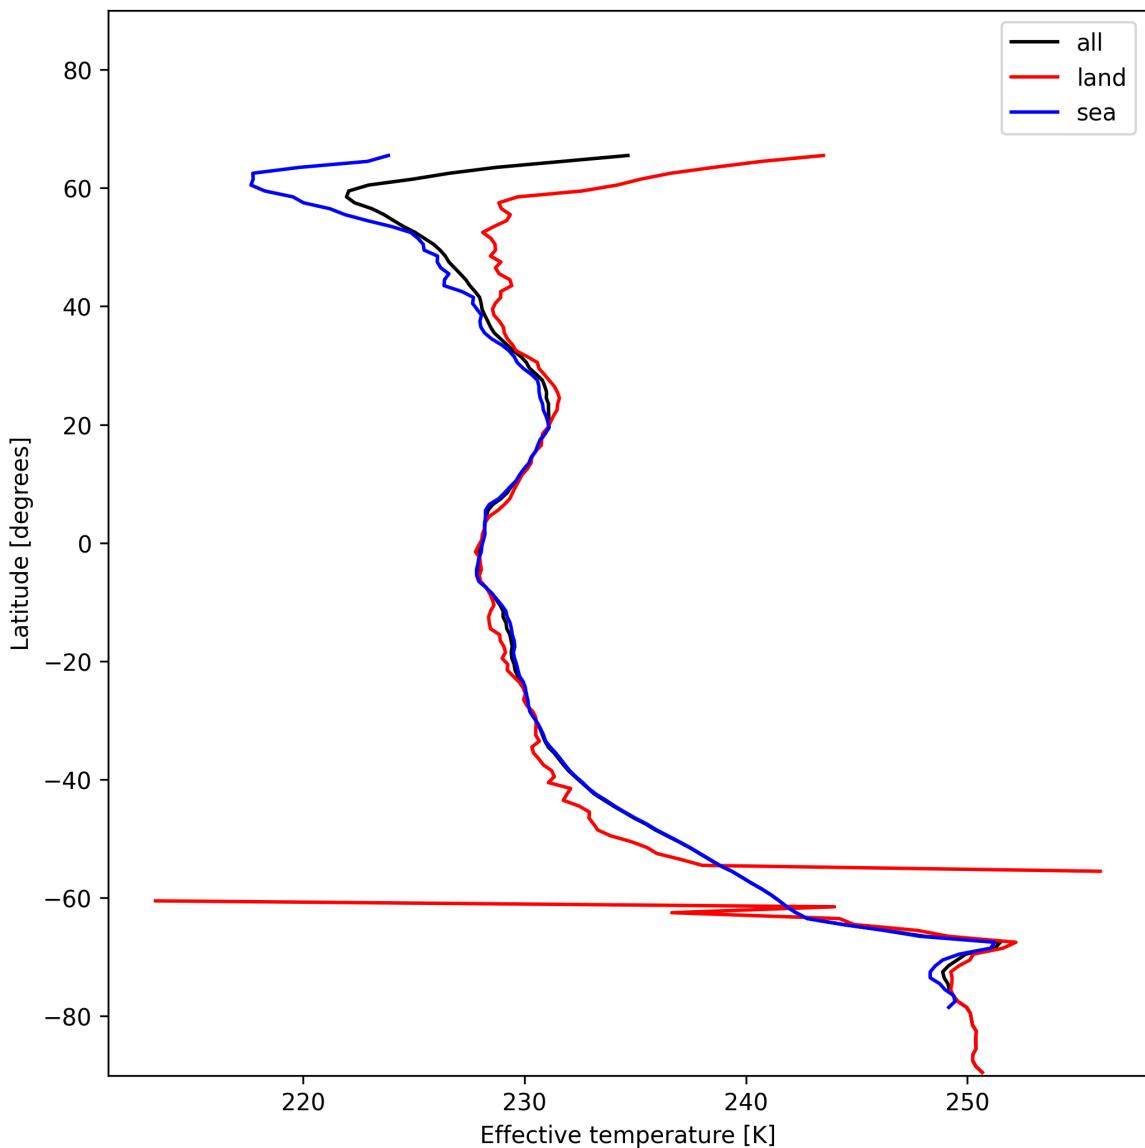


Figure 26: Zonal average of “Effective temperature” for 2024-12-17 to 2024-12-18.

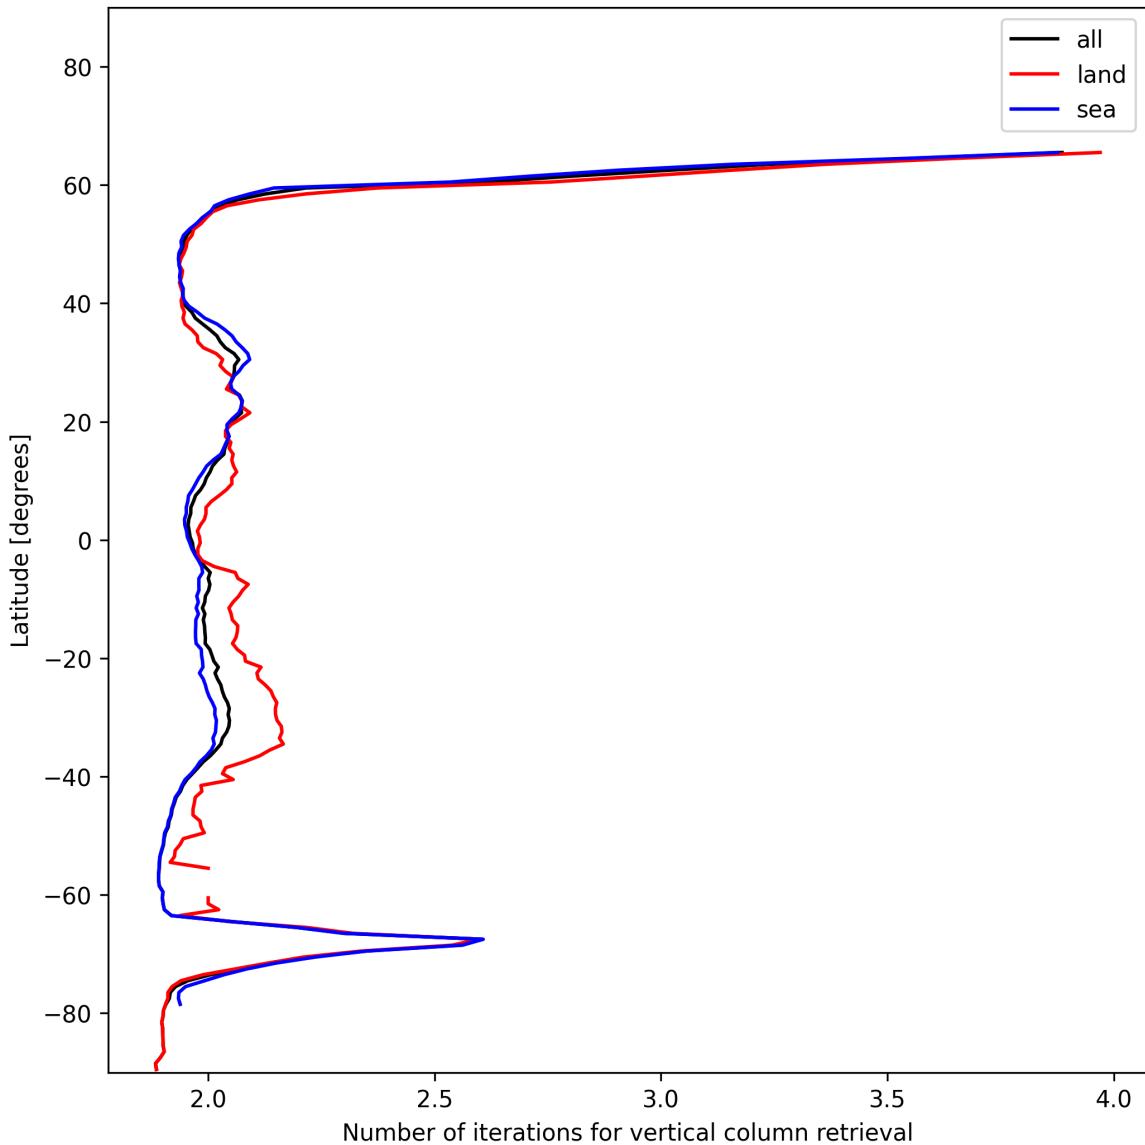


Figure 27: Zonal average of “Number of iterations for vertical column retrieval” for 2024-12-17 to 2024-12-18.

8 Histograms

The definitions of the parameters given in this section can be found in section 2.

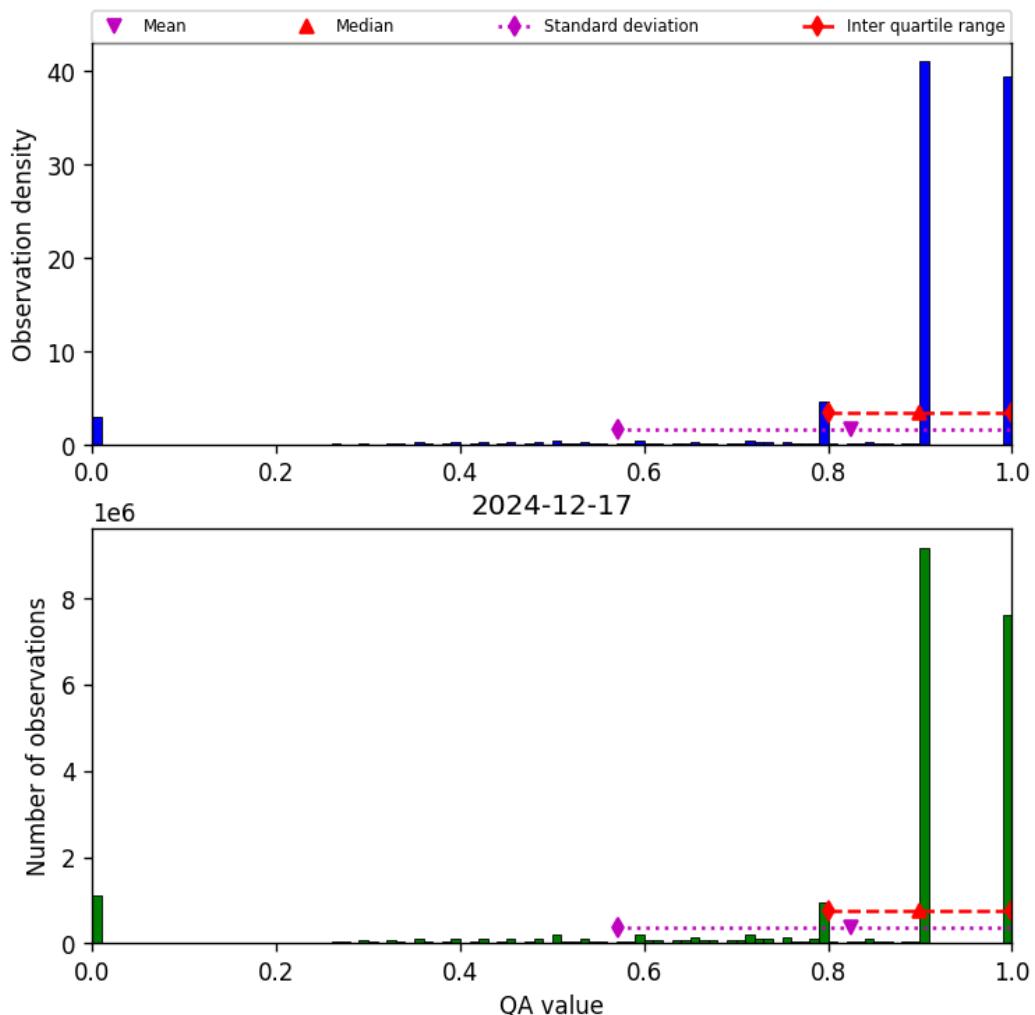


Figure 28: Histogram of “QA value” for 2024-12-17 to 2024-12-18

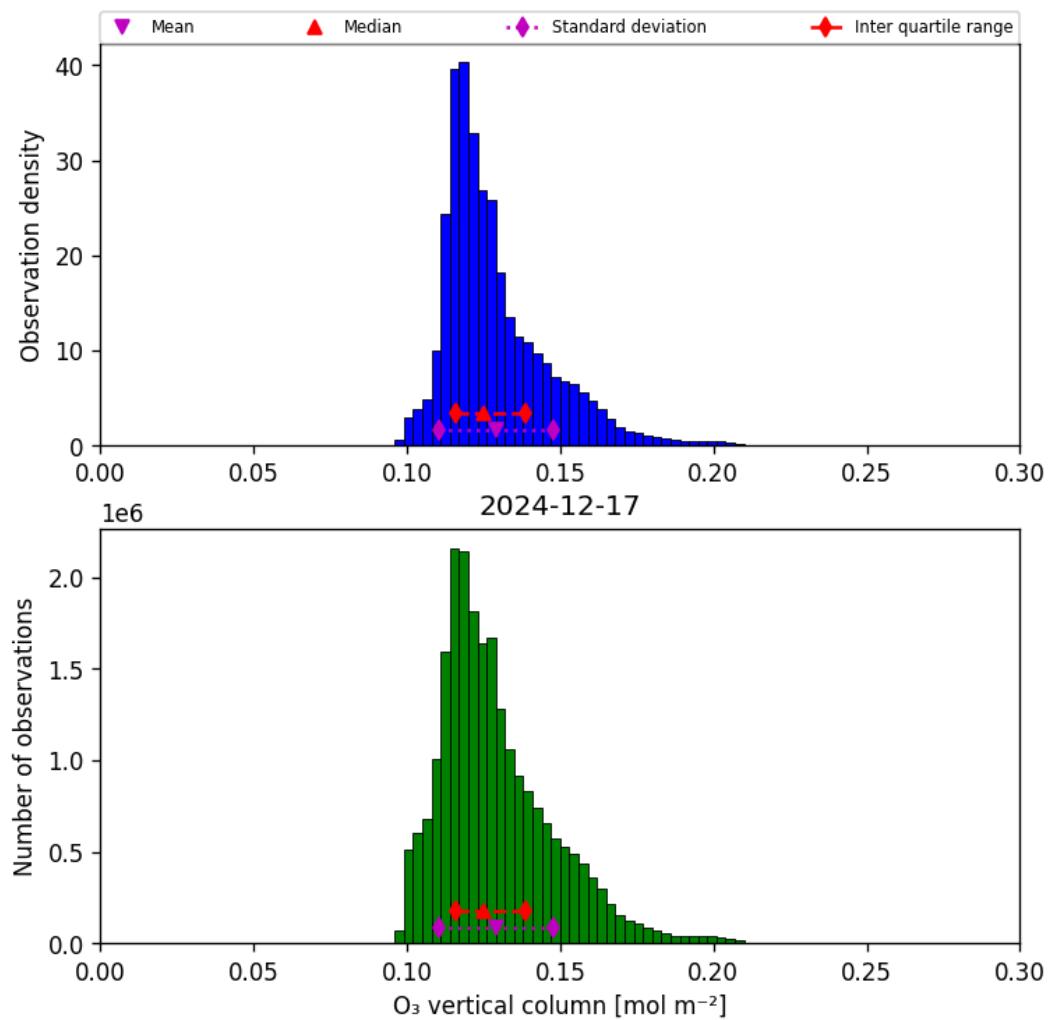


Figure 29: Histogram of “O₃ vertical column” for 2024-12-17 to 2024-12-18

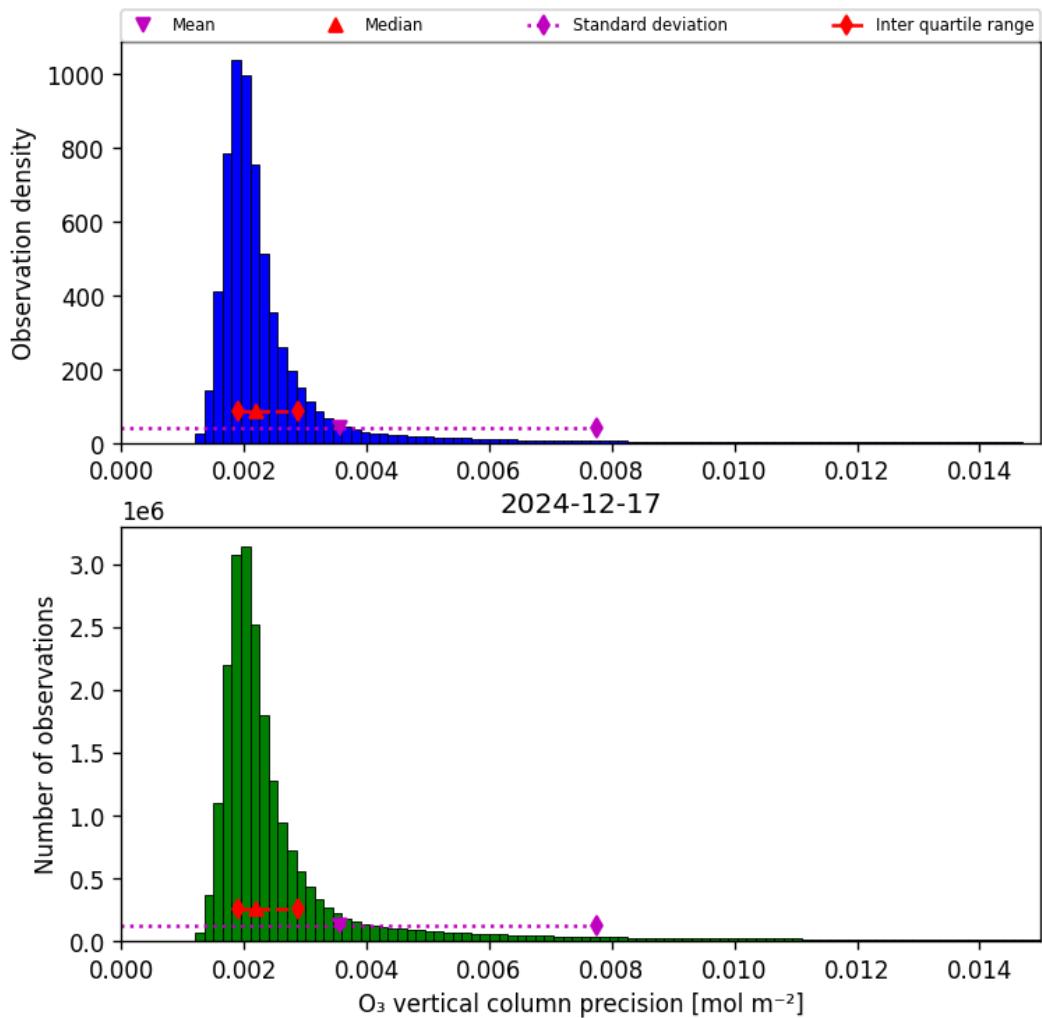


Figure 30: Histogram of “O₃ vertical column precision” for 2024-12-17 to 2024-12-18

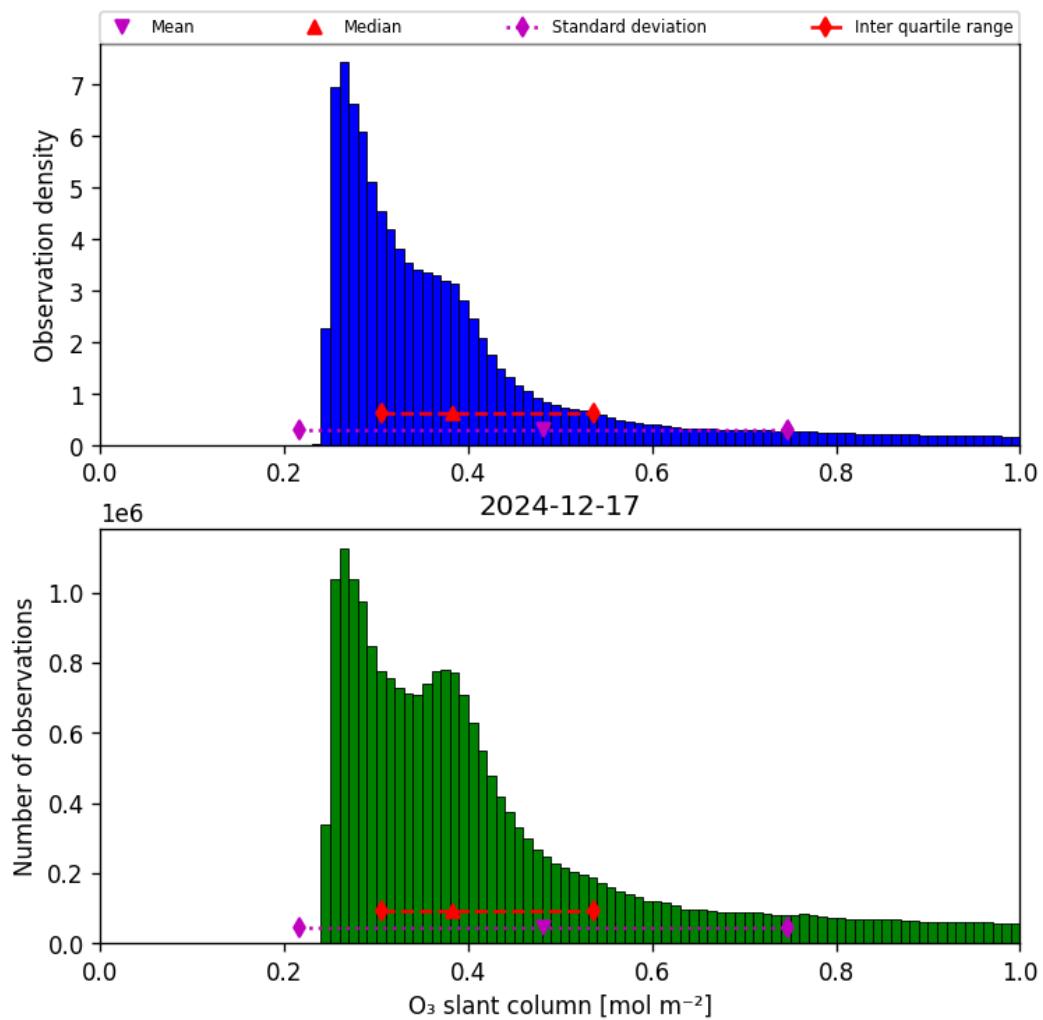


Figure 31: Histogram of “O₃ slant column” for 2024-12-17 to 2024-12-18

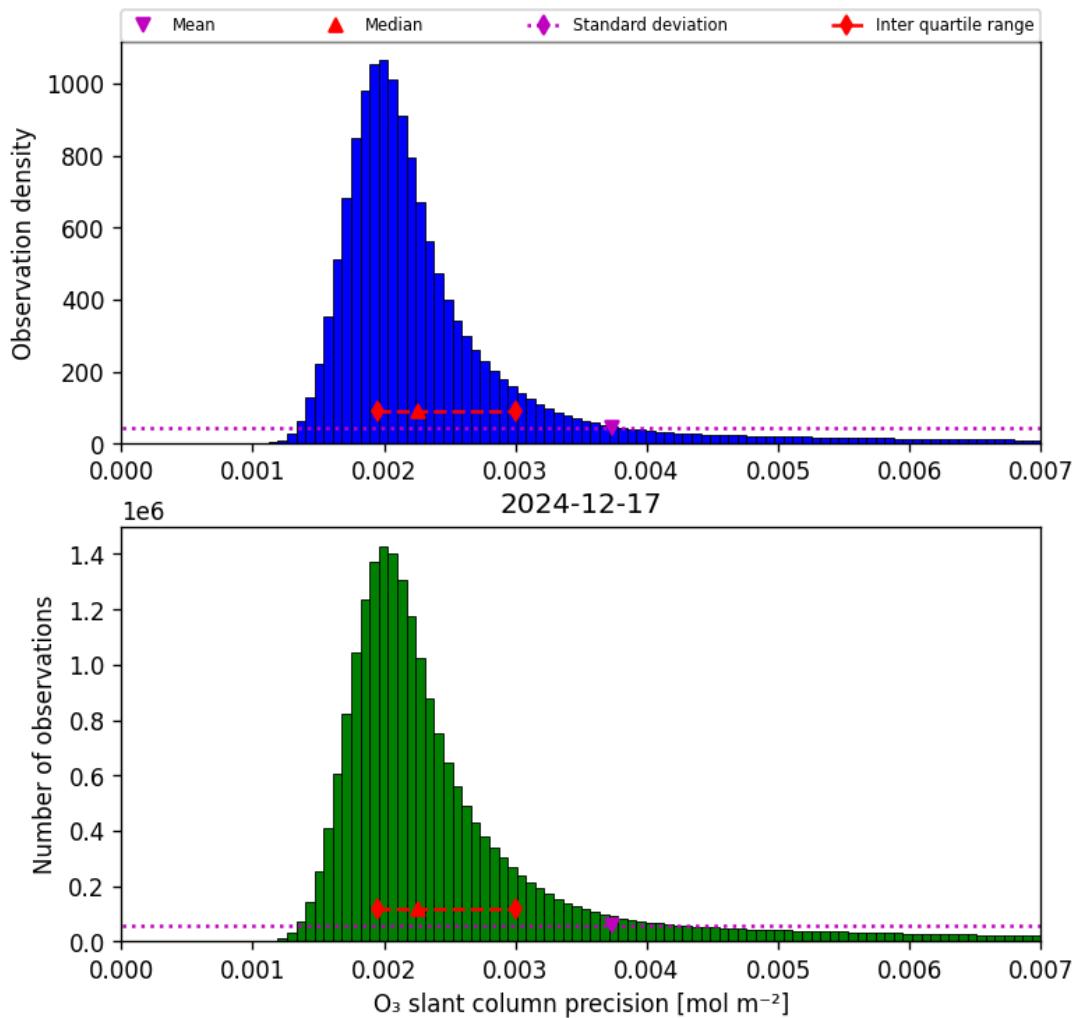


Figure 32: Histogram of “O₃ slant column precision” for 2024-12-17 to 2024-12-18

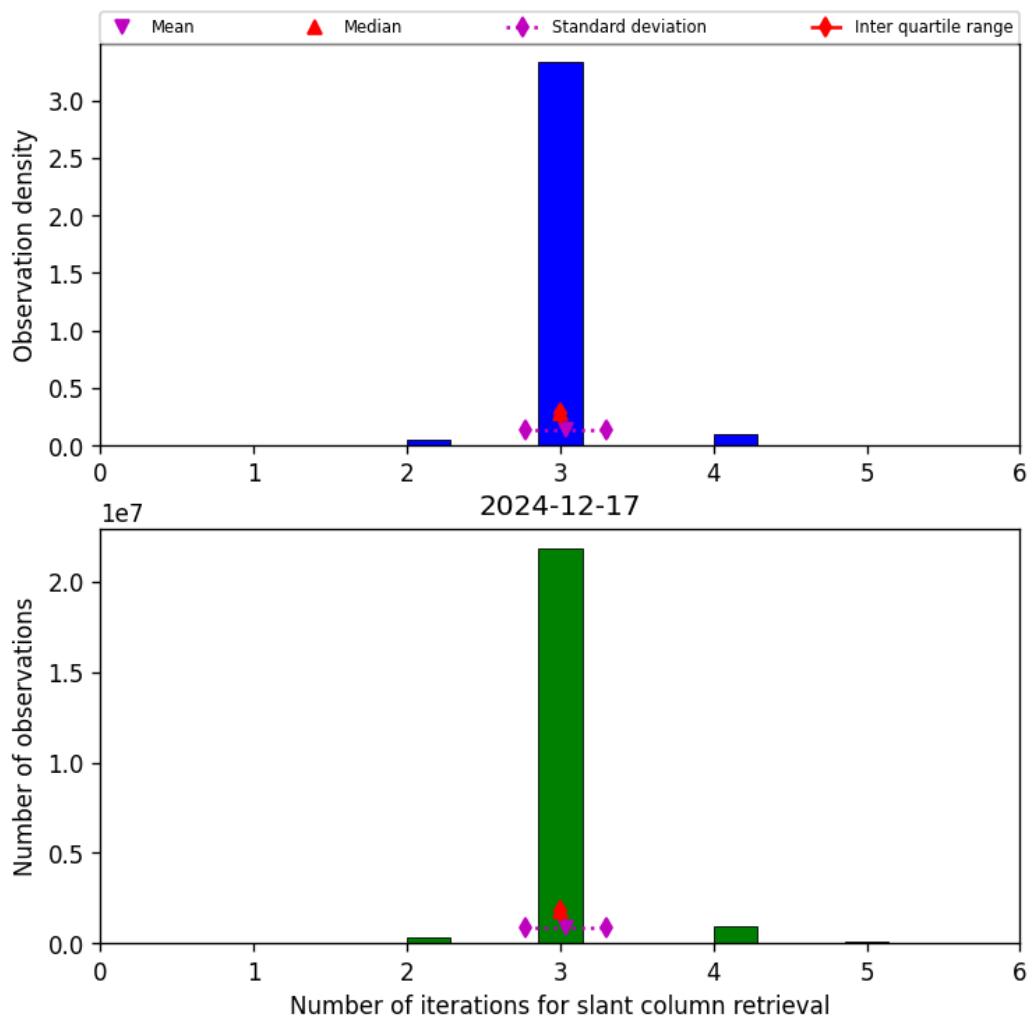


Figure 33: Histogram of “Number of iterations for slant column retrieval” for 2024-12-17 to 2024-12-18

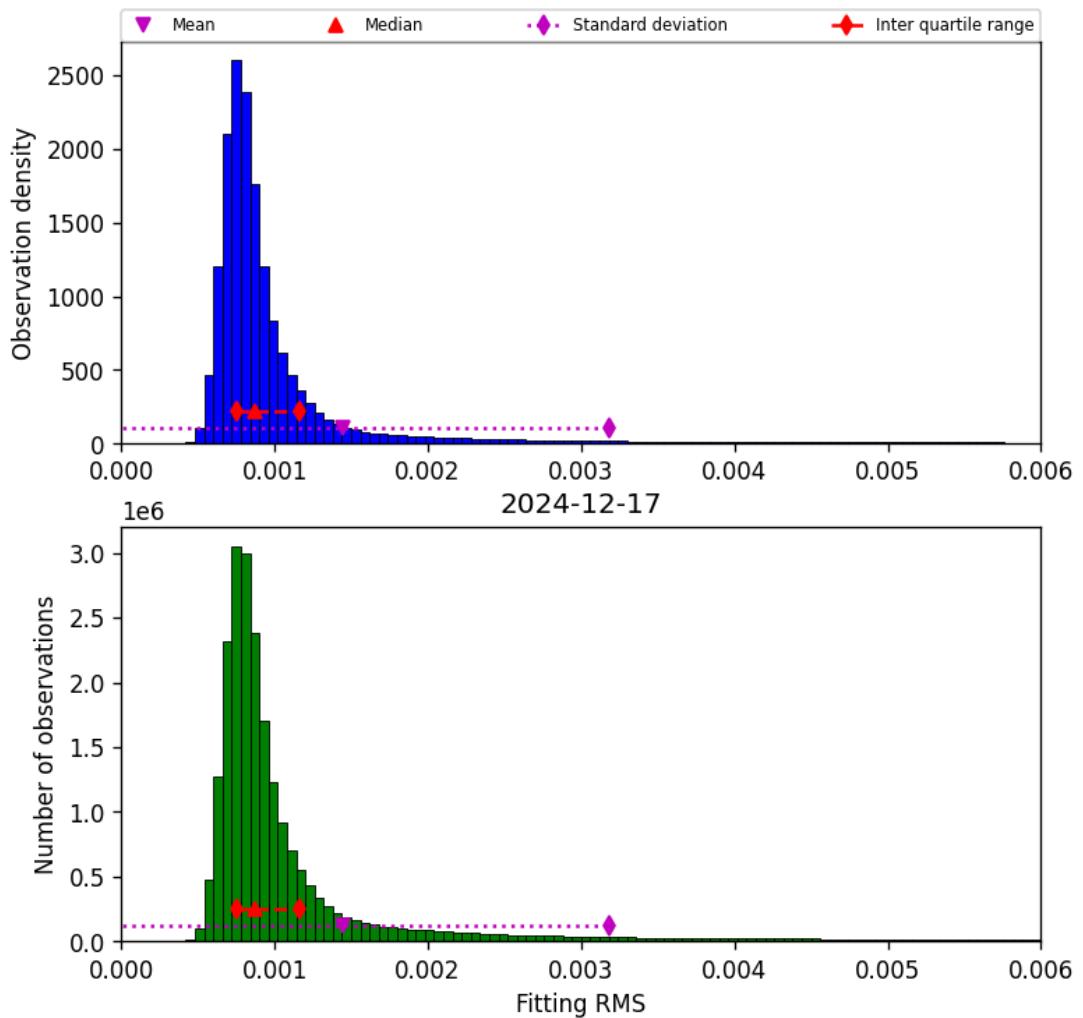


Figure 34: Histogram of “Fitting RMS” for 2024-12-17 to 2024-12-18

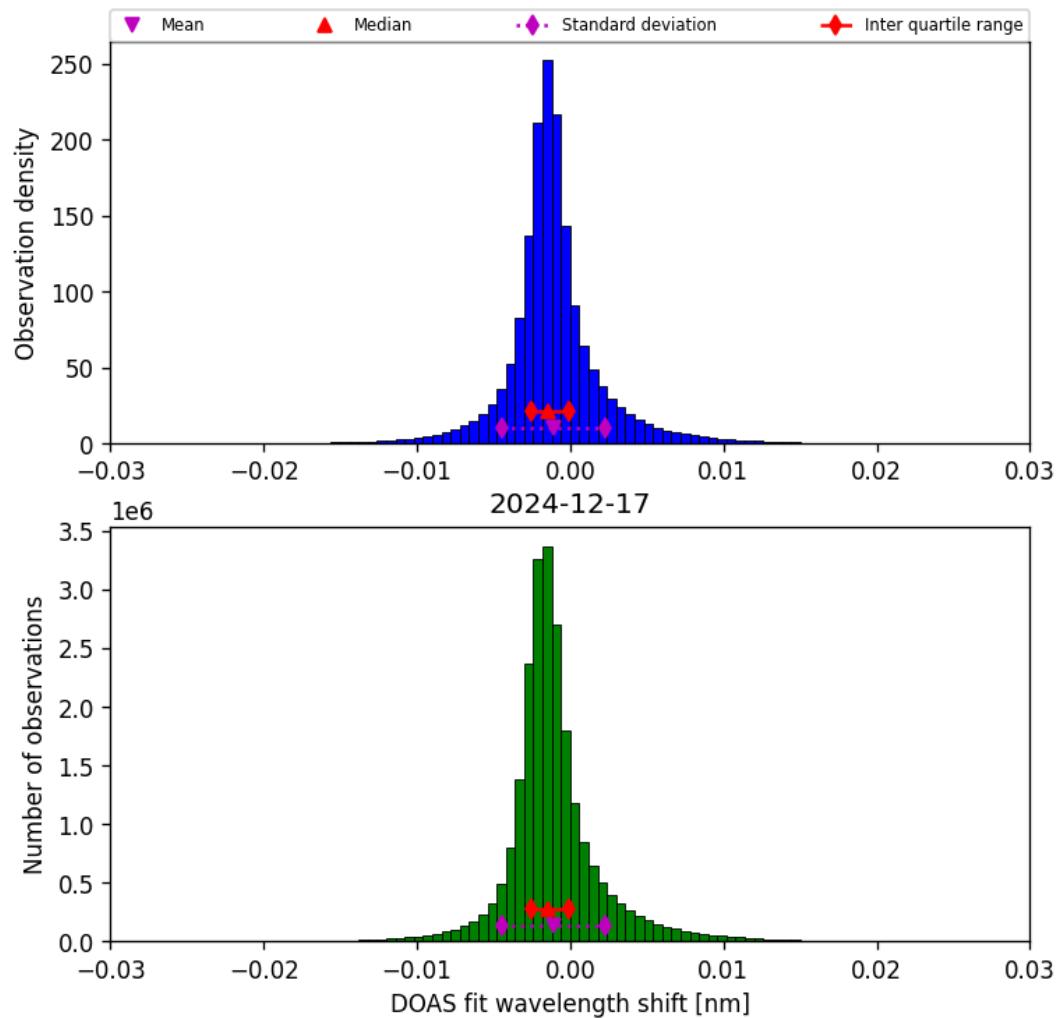


Figure 35: Histogram of “DOAS fit wavelength shift” for 2024-12-17 to 2024-12-18

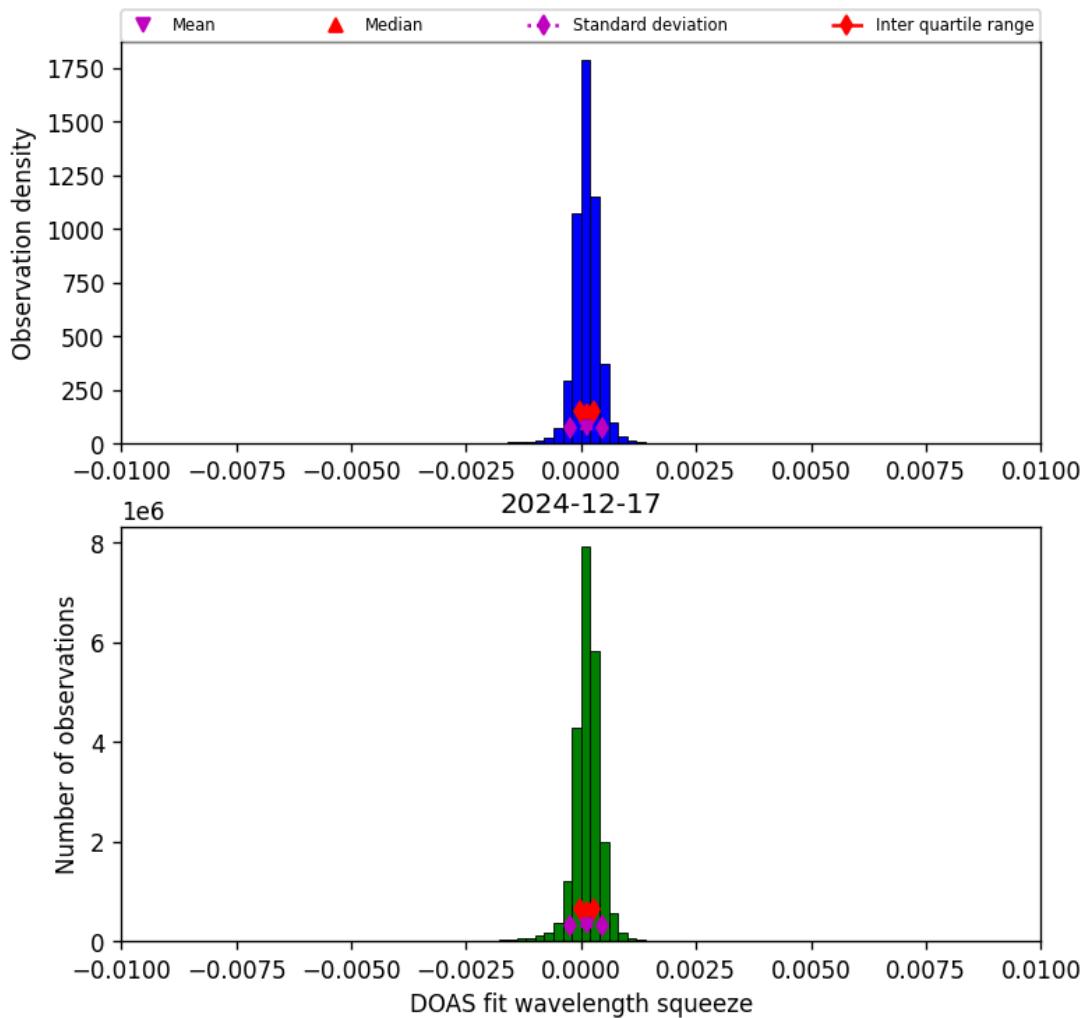


Figure 36: Histogram of “DOAS fit wavelength squeeze” for 2024-12-17 to 2024-12-18

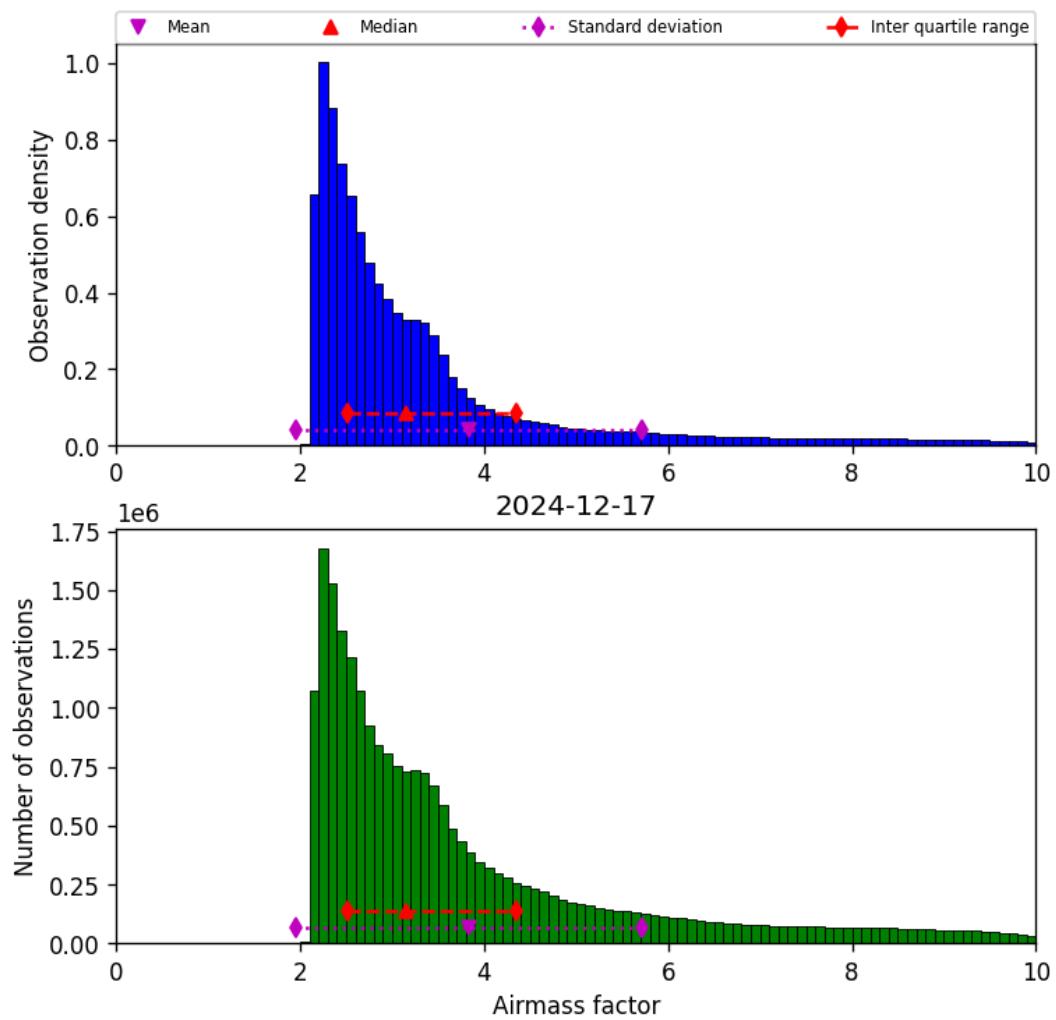


Figure 37: Histogram of “Airmass factor” for 2024-12-17 to 2024-12-18

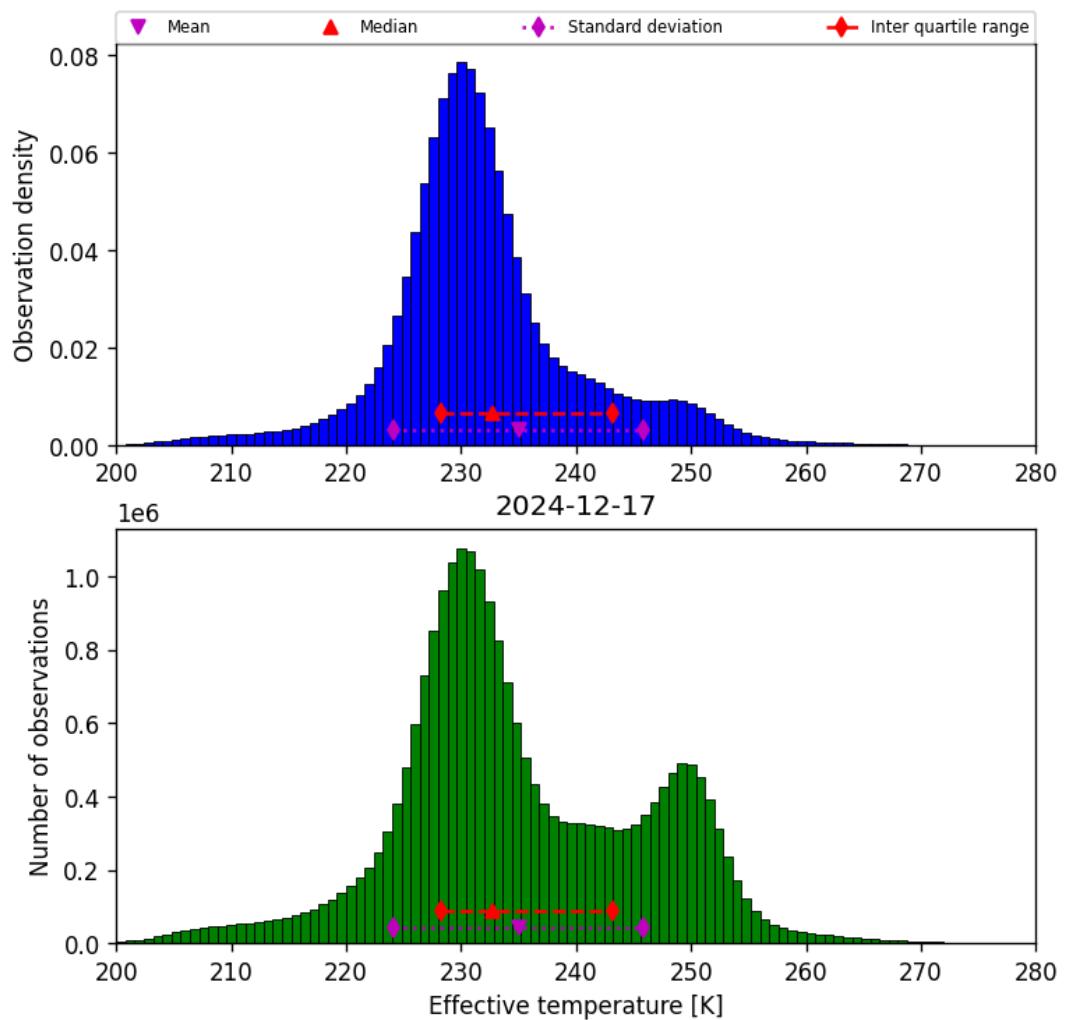


Figure 38: Histogram of “Effective temperature” for 2024-12-17 to 2024-12-18

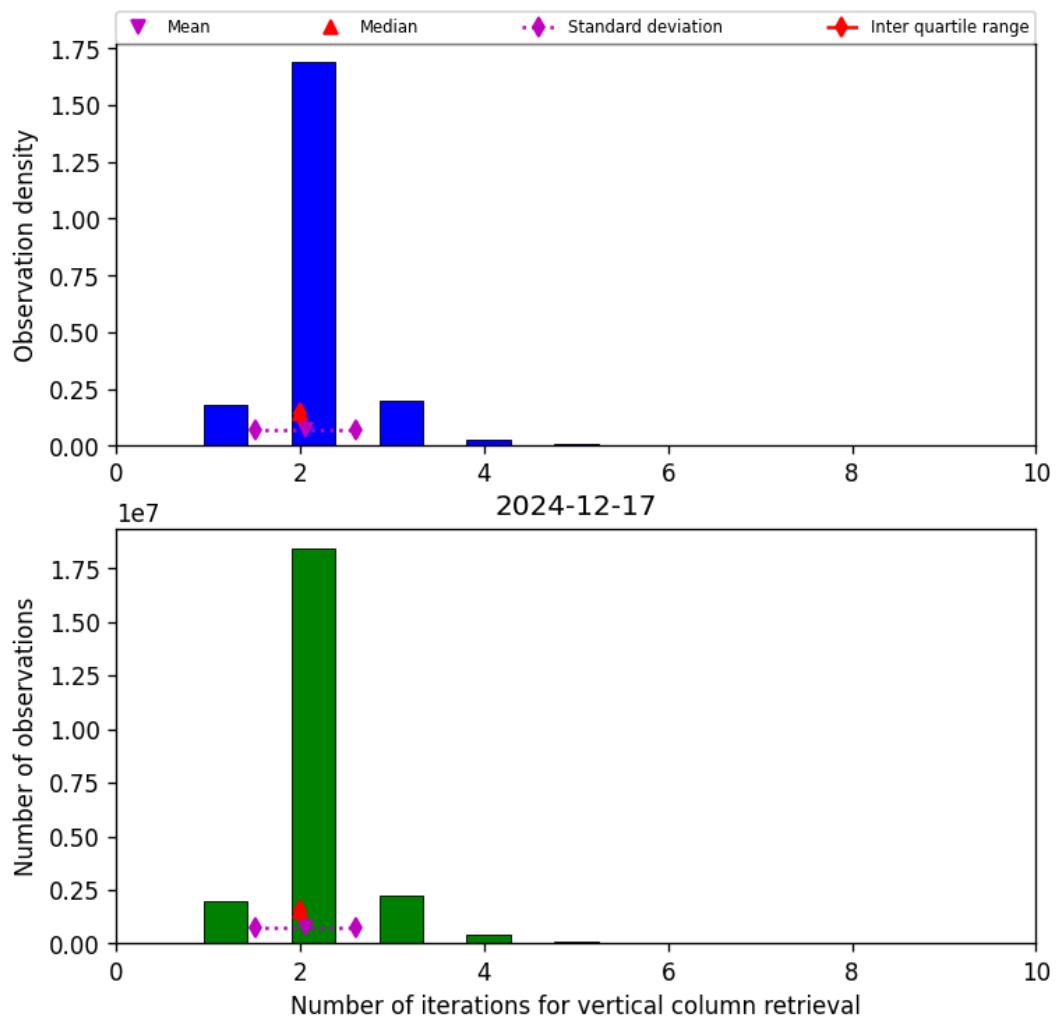


Figure 39: Histogram of “Number of iterations for vertical column retrieval” for 2024-12-17 to 2024-12-18

9 Along track statistics

The TROPOMI instrument uses different binned detector rows for different viewing directions. In this section statistics are presented for each of the binned rows in the instrument.

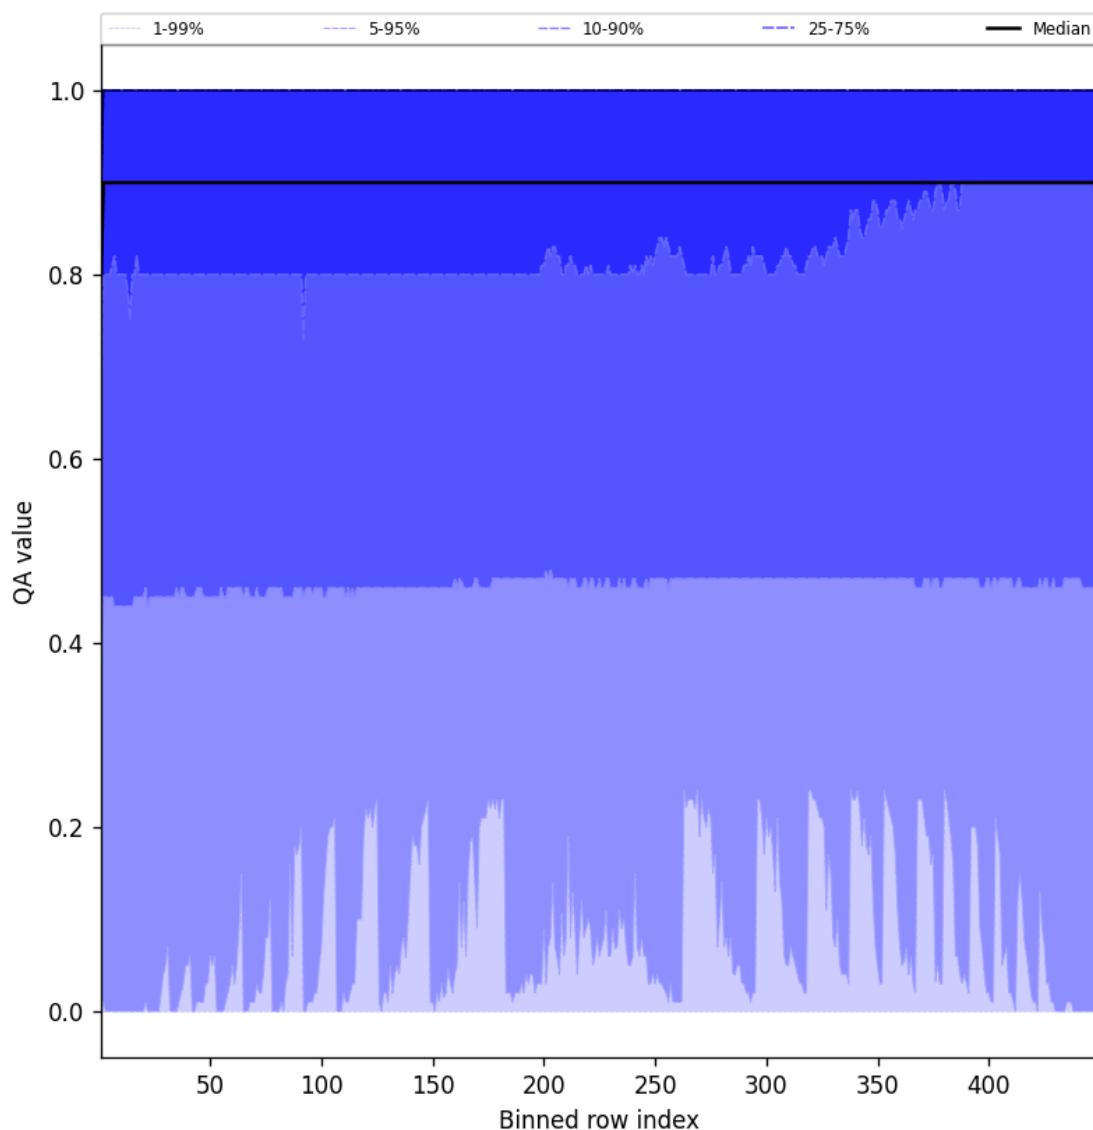


Figure 40: Along track statistics of “QA value” for 2024-12-17 to 2024-12-18

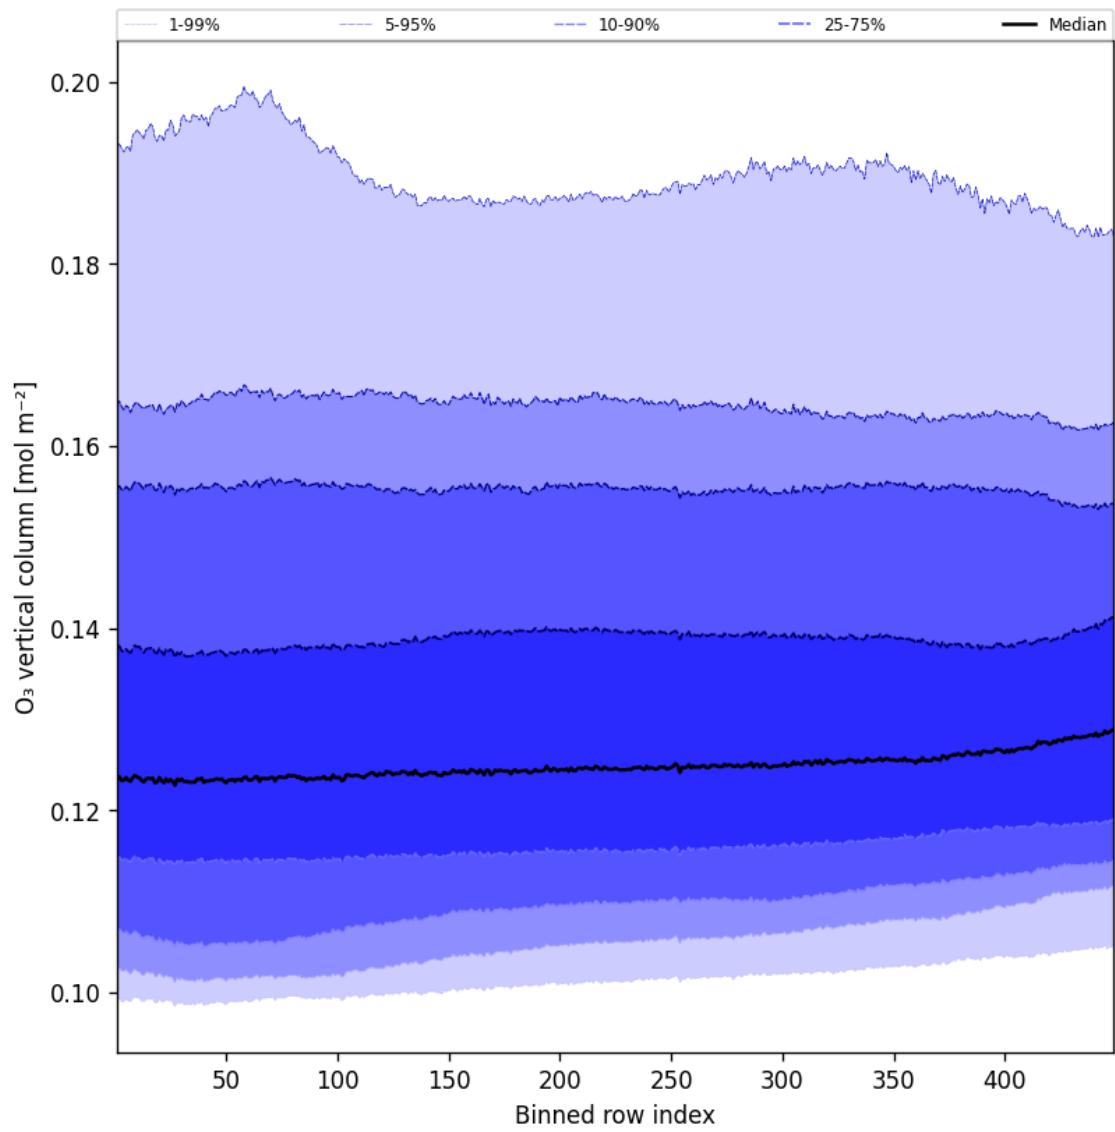


Figure 41: Along track statistics of “ O_3 vertical column” for 2024-12-17 to 2024-12-18

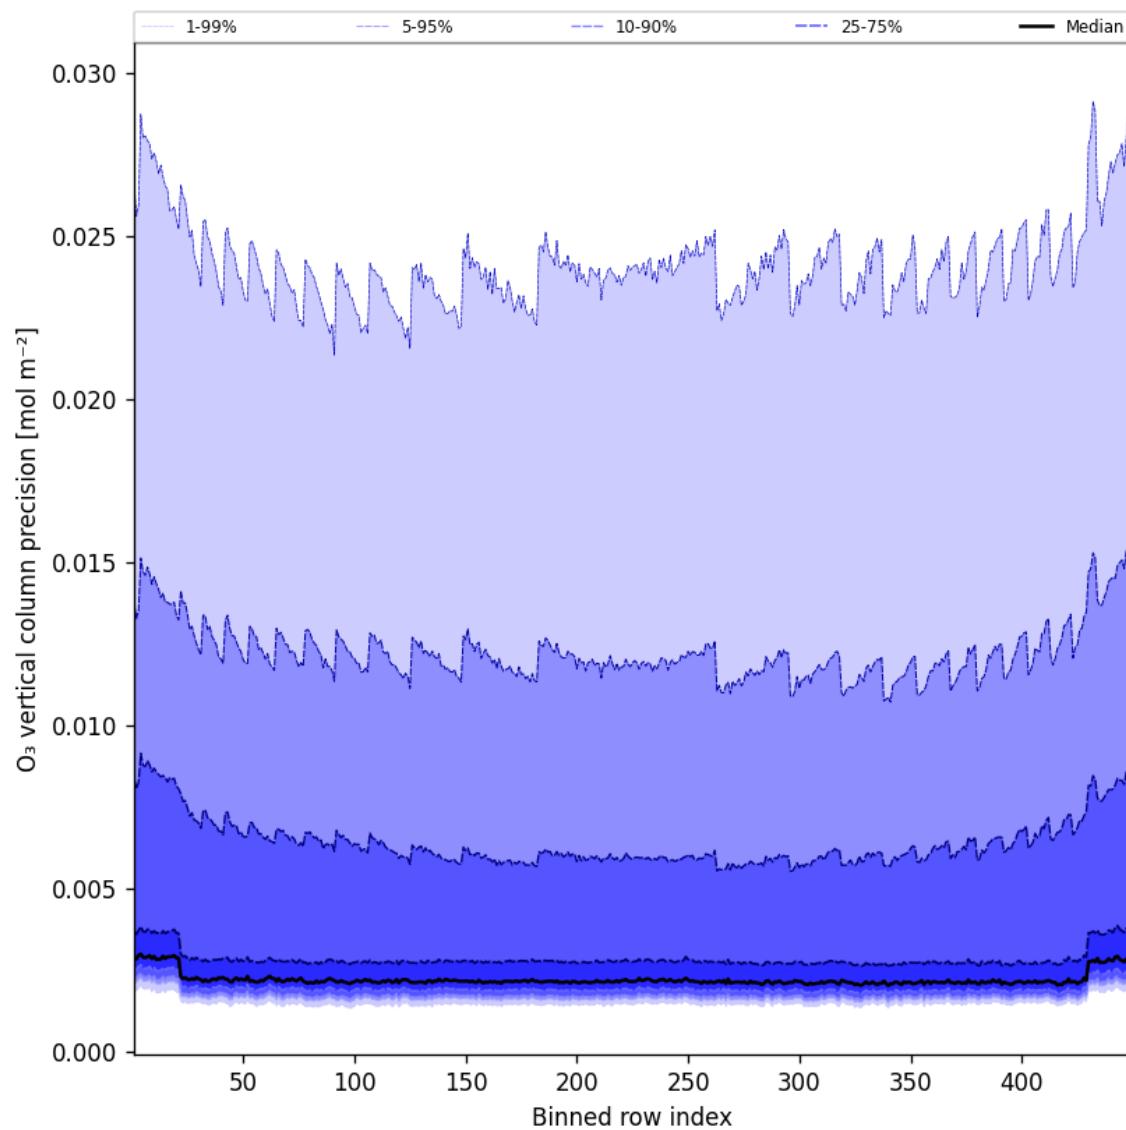


Figure 42: Along track statistics of “ O_3 vertical column precision” for 2024-12-17 to 2024-12-18

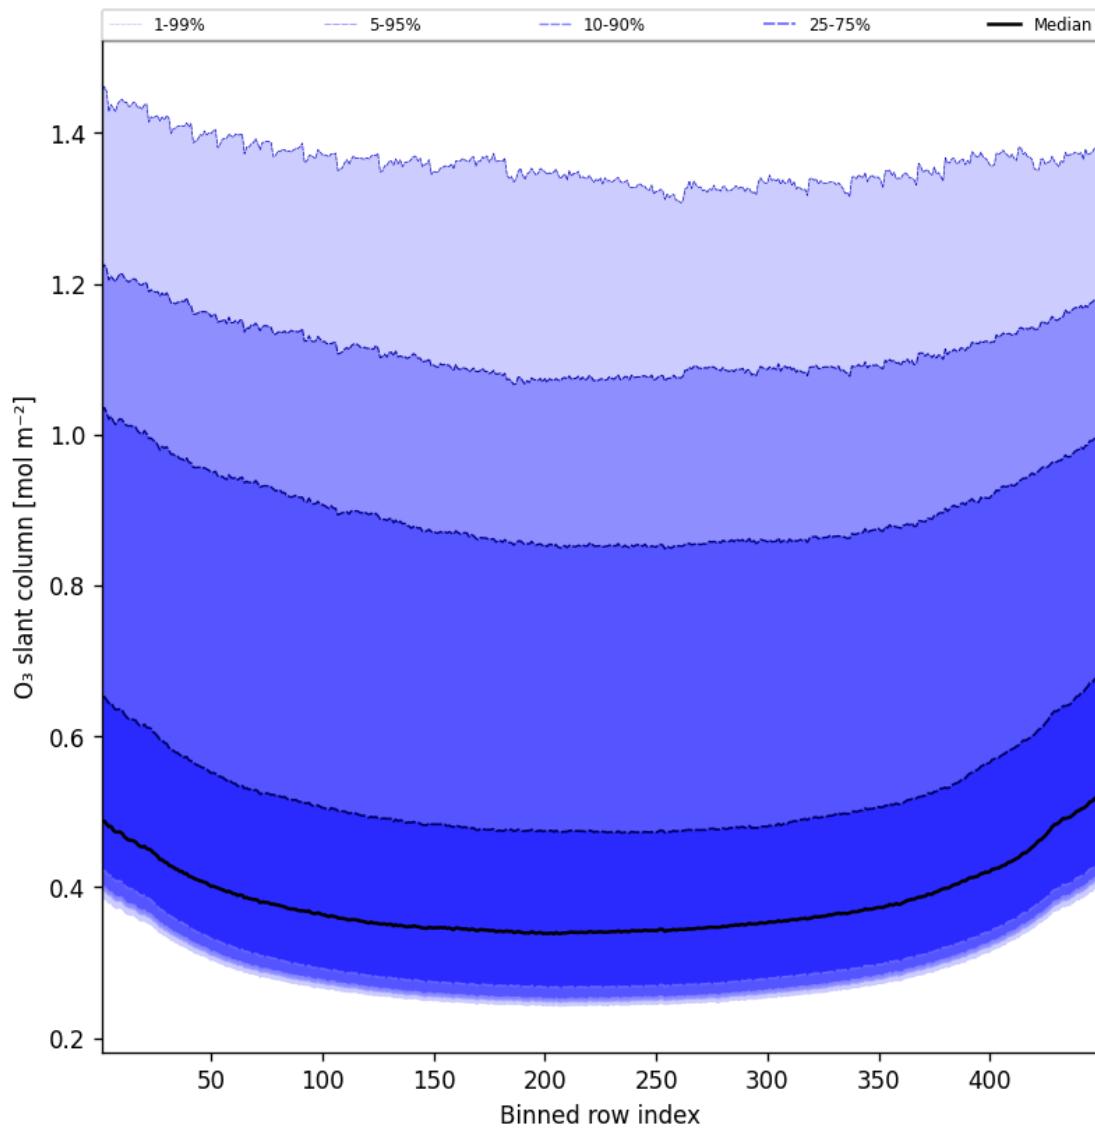


Figure 43: Along track statistics of “O₃ slant column” for 2024-12-17 to 2024-12-18

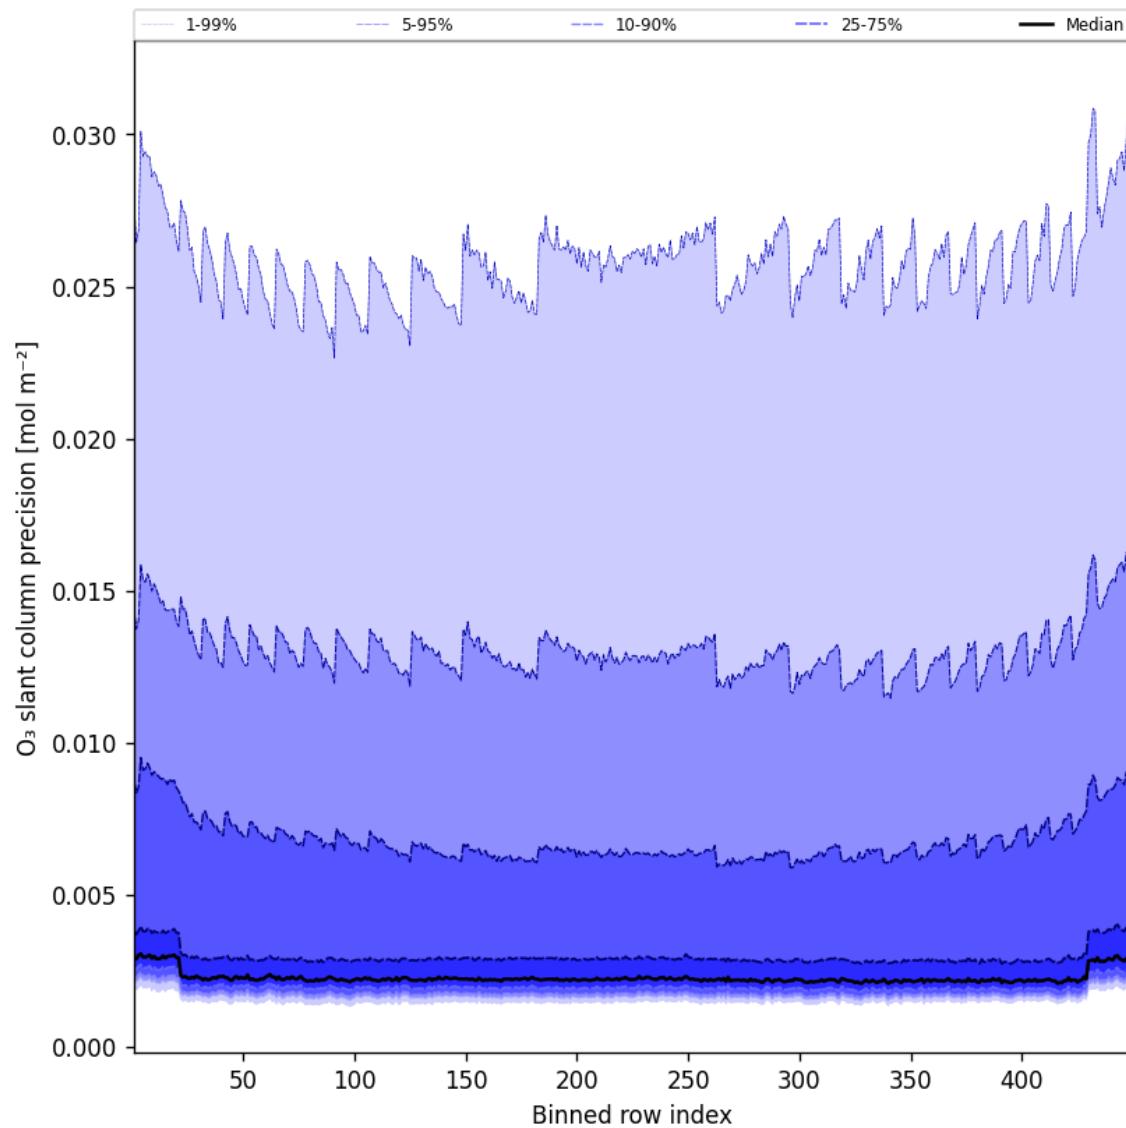


Figure 44: Along track statistics of “O₃ slant column precision” for 2024-12-17 to 2024-12-18

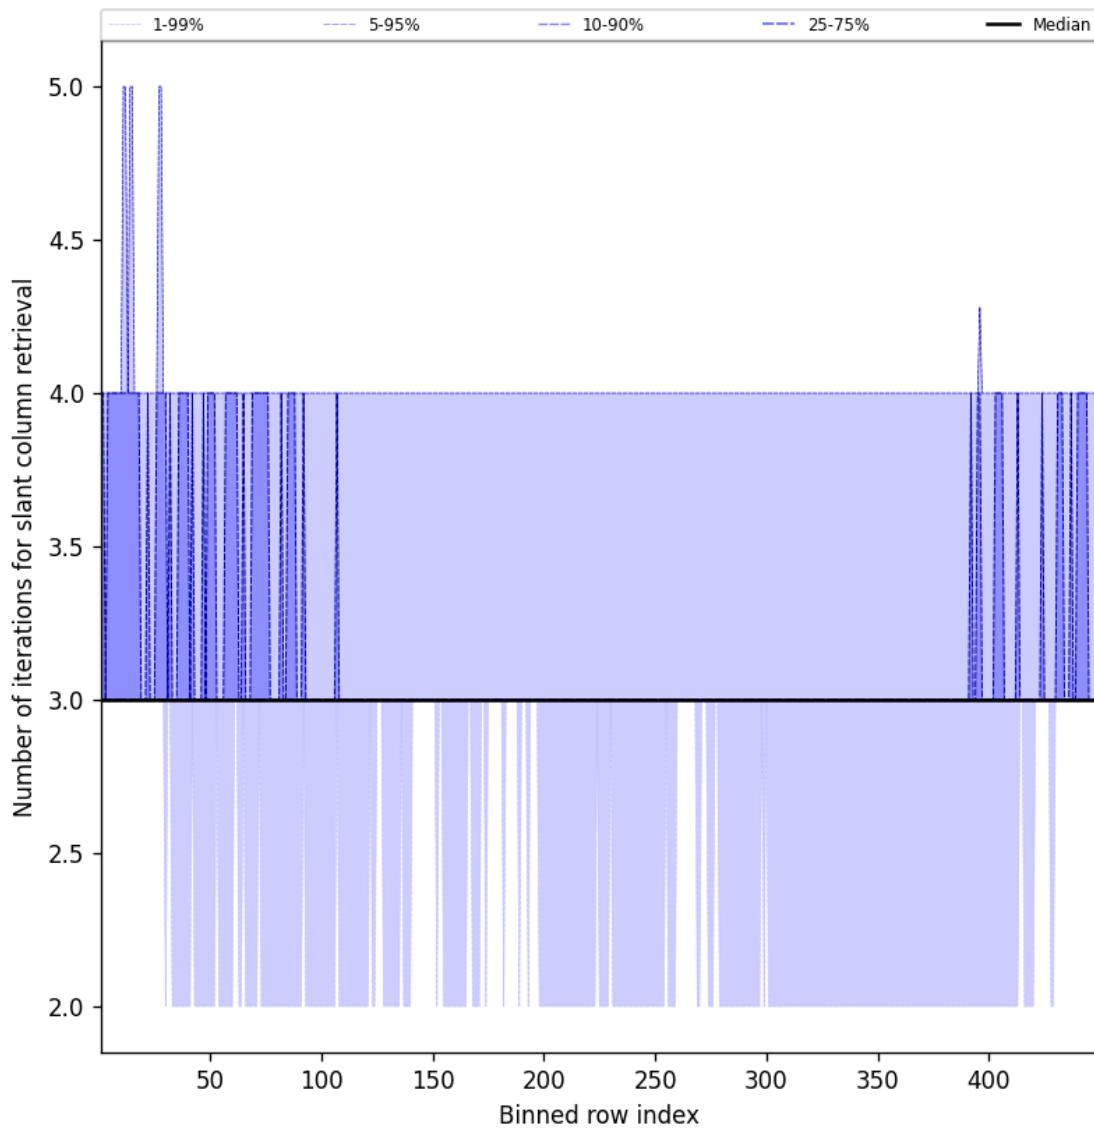


Figure 45: Along track statistics of “Number of iterations for slant column retrieval” for 2024-12-17 to 2024-12-18

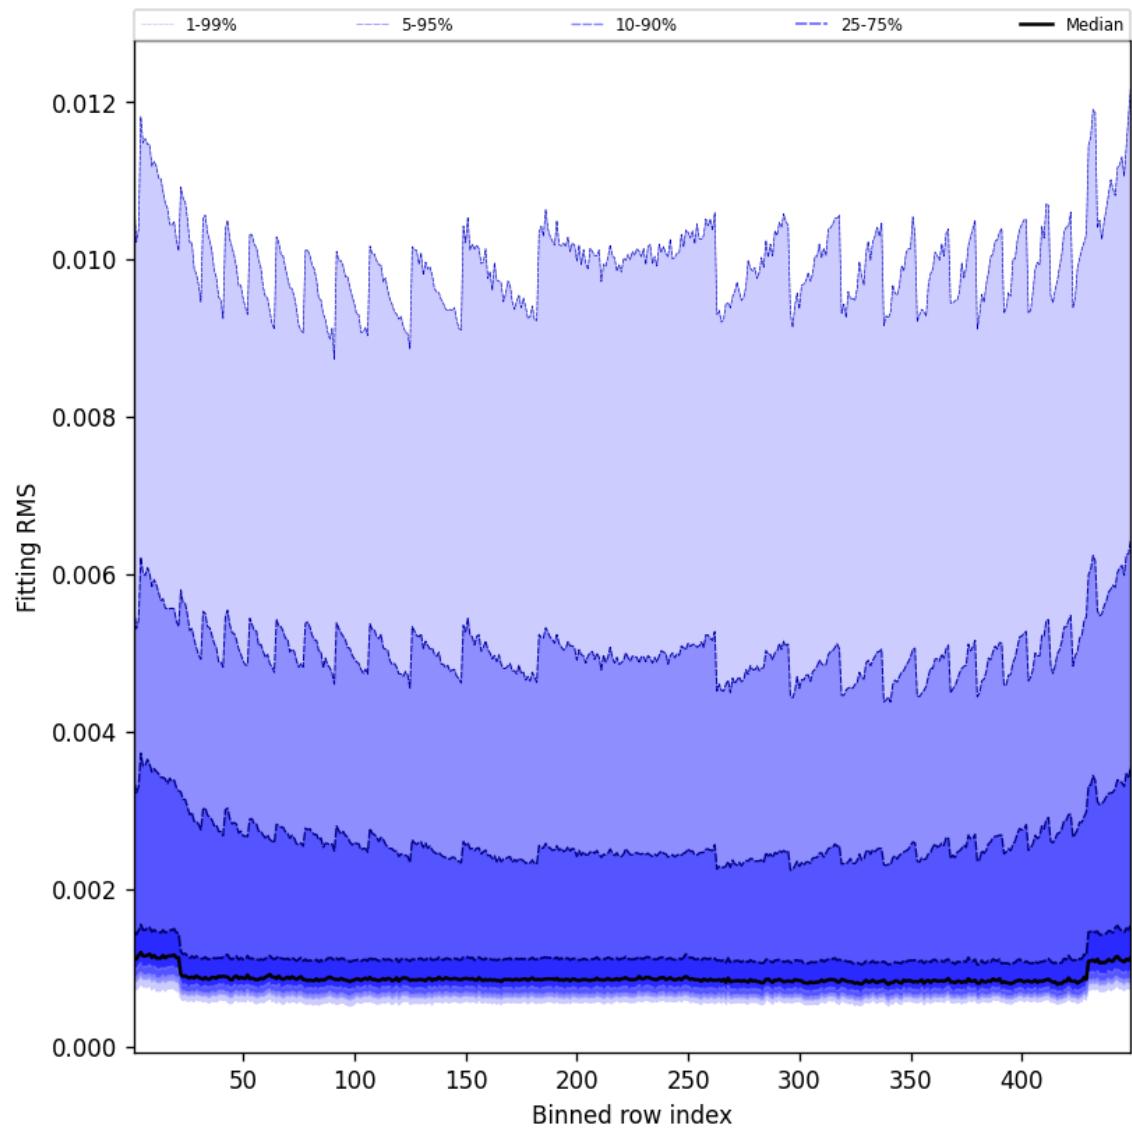


Figure 46: Along track statistics of “Fitting RMS” for 2024-12-17 to 2024-12-18

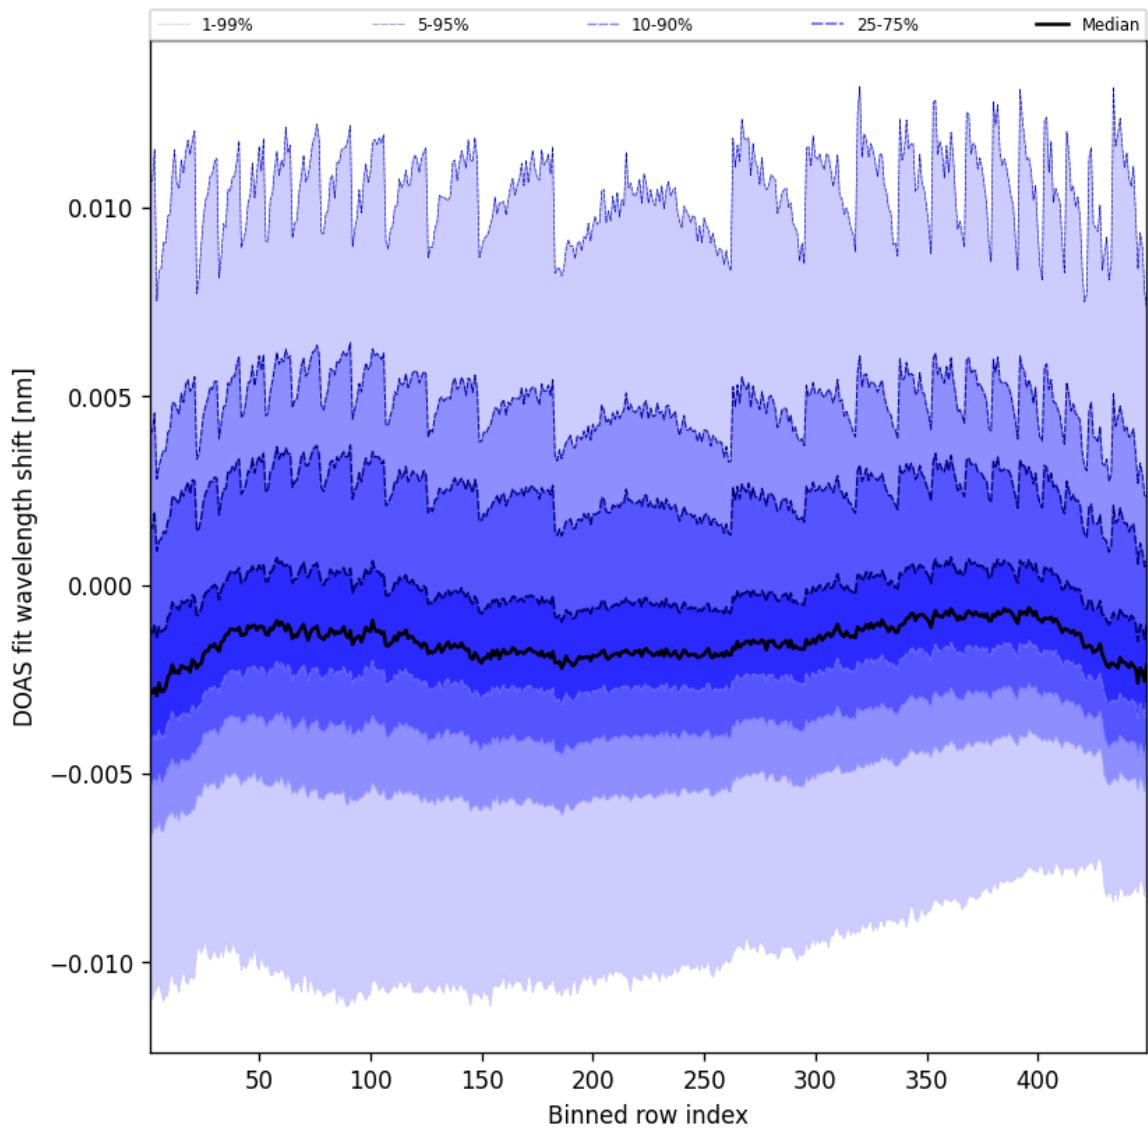


Figure 47: Along track statistics of “DOAS fit wavelength shift” for 2024-12-17 to 2024-12-18

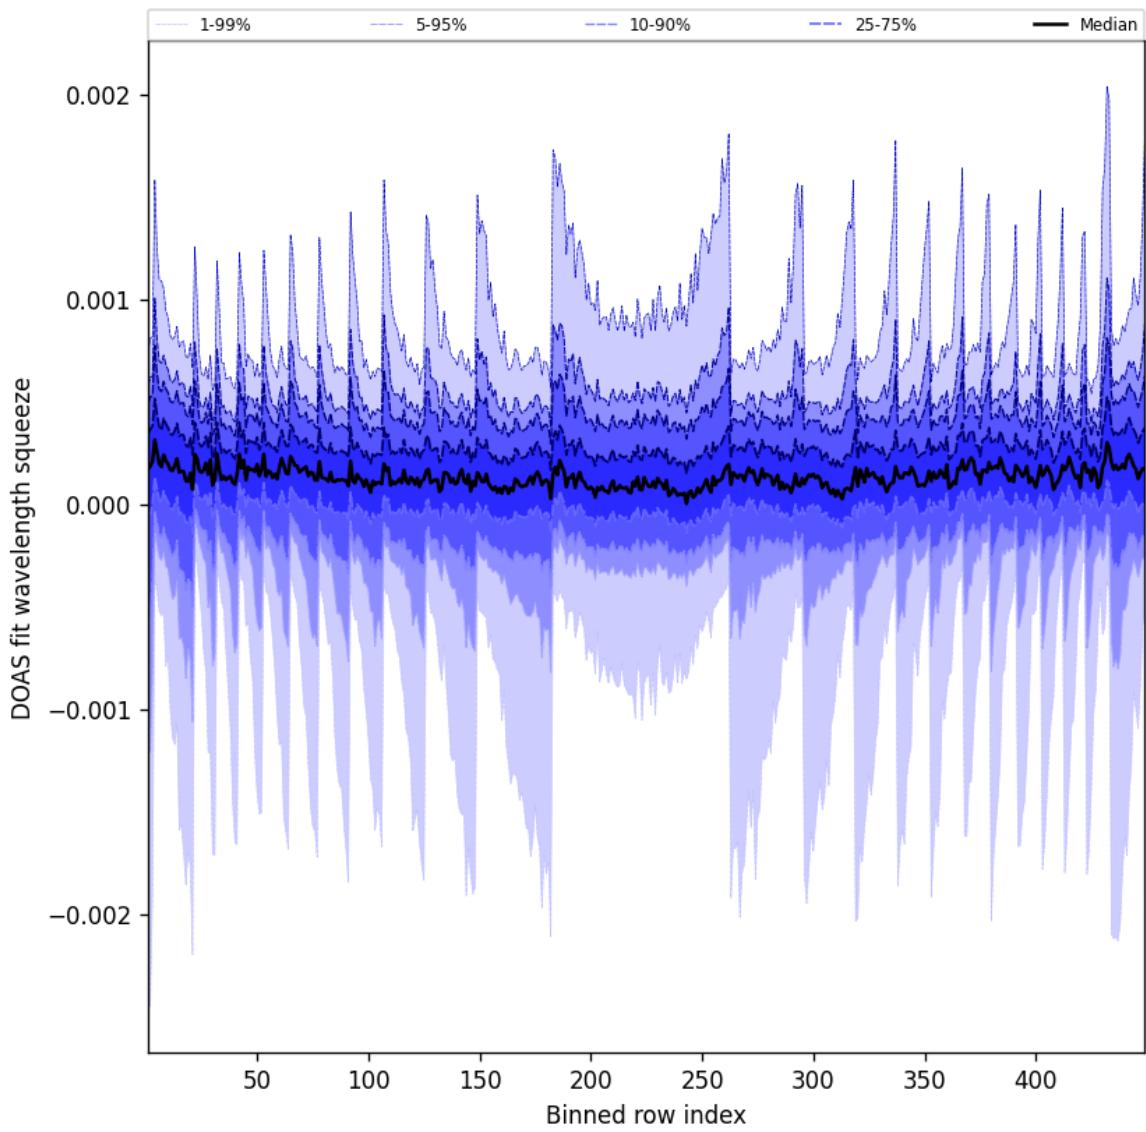


Figure 48: Along track statistics of “DOAS fit wavelength squeeze” for 2024-12-17 to 2024-12-18

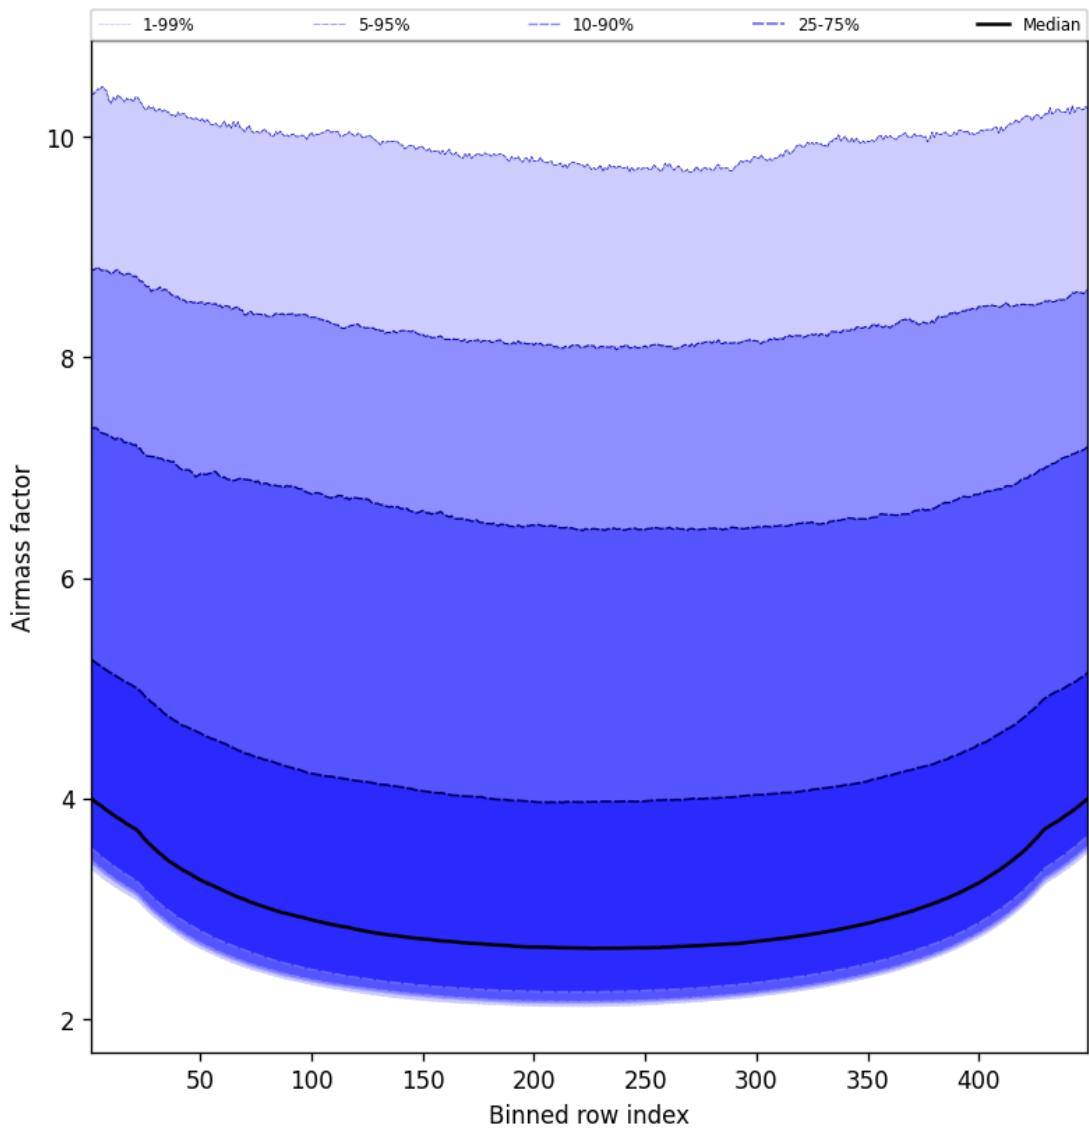


Figure 49: Along track statistics of “Airmass factor” for 2024-12-17 to 2024-12-18

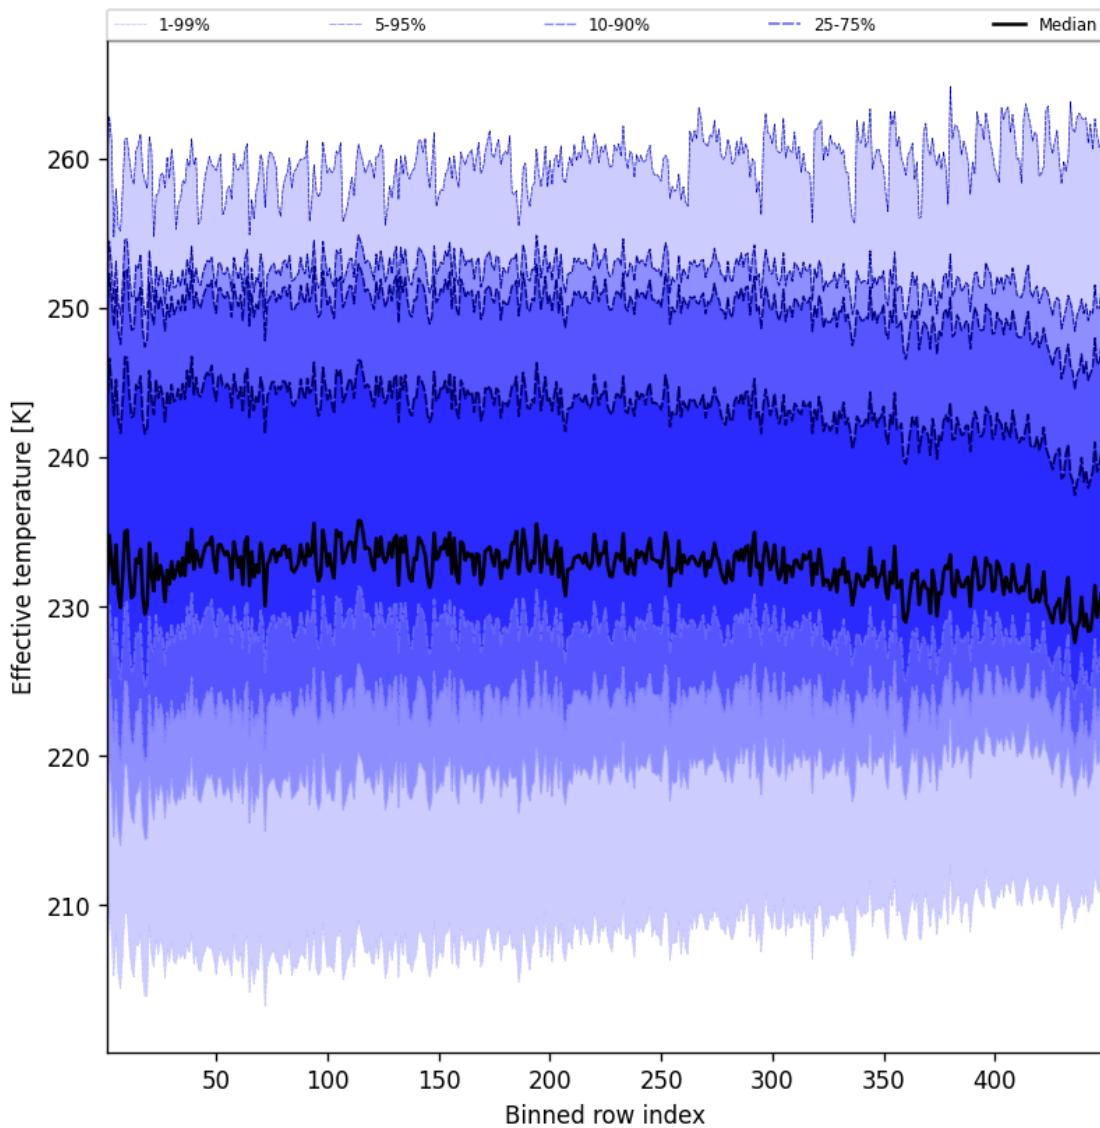


Figure 50: Along track statistics of “Effective temperature” for 2024-12-17 to 2024-12-18

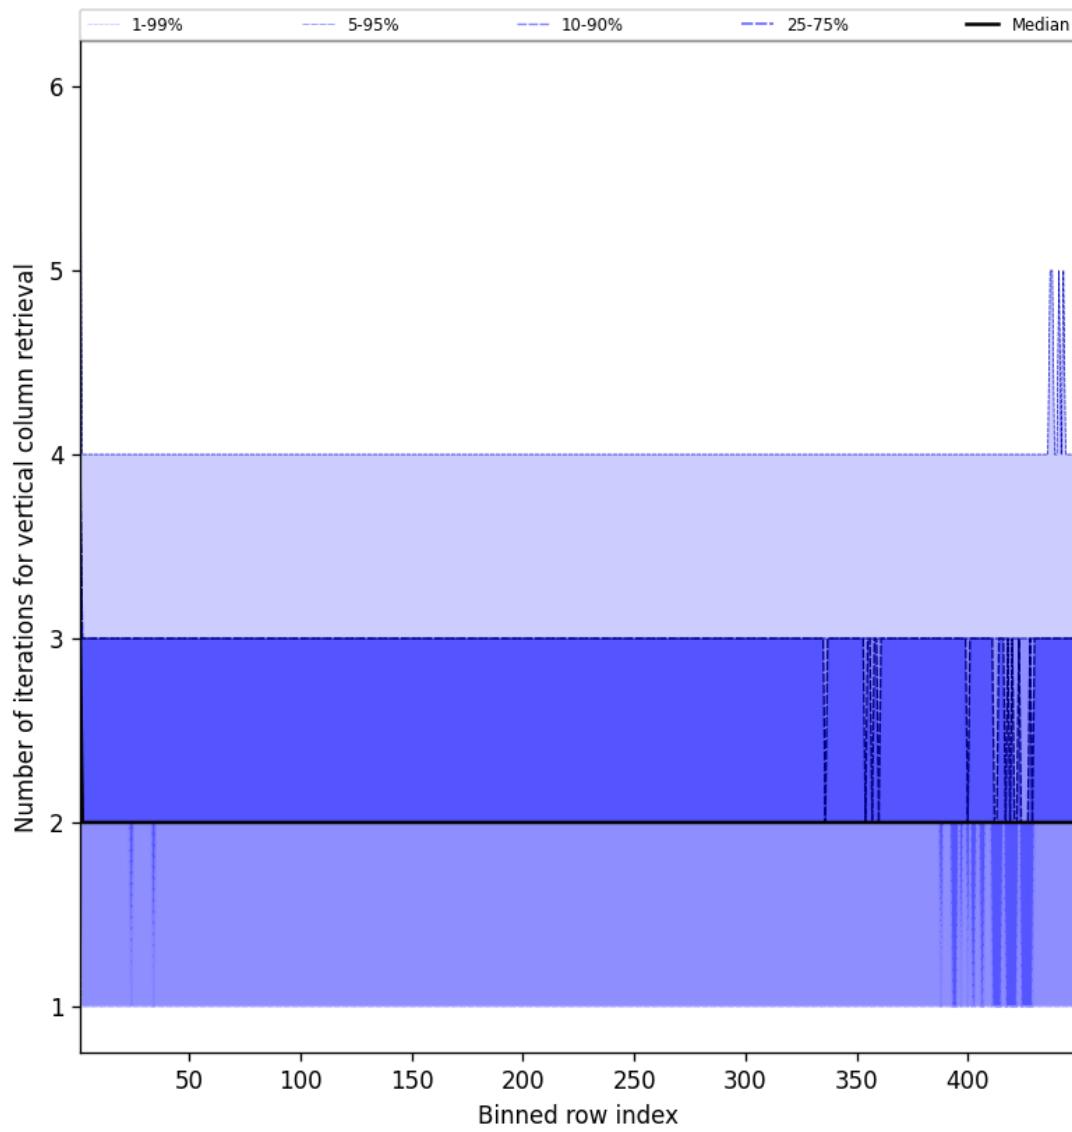


Figure 51: Along track statistics of “Number of iterations for vertical column retrieval” for 2024-12-17 to 2024-12-18

10 Coincidence density

To investigate the relation between parameters scatter density plots are produced. These include some ‘hidden’ parameters, latitude and the solar- and viewing geometries, in addition to all configured parameters. All combinations of pairs of parameters are included *once*, in one direction alone.

Contents

1	Short Introduction	1
1.1	The list of parameters	1
2	Definitions	1
3	Granule outlines	8
4	Input data monitoring	9
5	Warnings and errors	10
6	World maps	11
7	Zonal average	23
8	Histograms	35
9	Along track statistics	47
10	Coincidence density	59
11	Copyright information of ‘PyCAMA’	59

List of Figures

1	Outline of the granules.	8
2	Input data per granule	9
3	Fraction of pixels with specific warnings and errors during processing	10
4	Map of “O ₃ vertical column” for 2024-12-17 to 2024-12-18	11
5	Map of “O ₃ vertical column precision” for 2024-12-17 to 2024-12-18	12
6	Map of “O ₃ slant column” for 2024-12-17 to 2024-12-18	13
7	Map of “O ₃ slant column precision” for 2024-12-17 to 2024-12-18	14
8	Map of “Number of iterations for slant column retrieval” for 2024-12-17 to 2024-12-18	15
9	Map of “Fitting RMS” for 2024-12-17 to 2024-12-18	16
10	Map of “DOAS fit wavelength shift” for 2024-12-17 to 2024-12-18	17
11	Map of “DOAS fit wavelength squeeze” for 2024-12-17 to 2024-12-18	18
12	Map of “Airmass factor” for 2024-12-17 to 2024-12-18	19
13	Map of “Effective temperature” for 2024-12-17 to 2024-12-18	20
14	Map of “Number of iterations for vertical column retrieval” for 2024-12-17 to 2024-12-18	21
15	Map of the number of observations for 2024-12-17 to 2024-12-18	22
16	Zonal average of “QA value” for 2024-12-17 to 2024-12-18.	23
17	Zonal average of “O ₃ vertical column” for 2024-12-17 to 2024-12-18.	24
18	Zonal average of “O ₃ vertical column precision” for 2024-12-17 to 2024-12-18.	25
19	Zonal average of “O ₃ slant column” for 2024-12-17 to 2024-12-18.	26
20	Zonal average of “O ₃ slant column precision” for 2024-12-17 to 2024-12-18.	27
21	Zonal average of “Number of iterations for slant column retrieval” for 2024-12-17 to 2024-12-18.	28
22	Zonal average of “Fitting RMS” for 2024-12-17 to 2024-12-18.	29
23	Zonal average of “DOAS fit wavelength shift” for 2024-12-17 to 2024-12-18.	30
24	Zonal average of “DOAS fit wavelength squeeze” for 2024-12-17 to 2024-12-18.	31
25	Zonal average of “Airmass factor” for 2024-12-17 to 2024-12-18.	32
26	Zonal average of “Effective temperature” for 2024-12-17 to 2024-12-18.	33
27	Zonal average of “Number of iterations for vertical column retrieval” for 2024-12-17 to 2024-12-18.	34
28	Histogram of “QA value” for 2024-12-17 to 2024-12-18	35
29	Histogram of “O ₃ vertical column” for 2024-12-17 to 2024-12-18	36

30	Histogram of “O ₃ vertical column precision” for 2024-12-17 to 2024-12-18	37
31	Histogram of “O ₃ slant column” for 2024-12-17 to 2024-12-18	38
32	Histogram of “O ₃ slant column precision” for 2024-12-17 to 2024-12-18	39
33	Histogram of “Number of iterations for slant column retrieval” for 2024-12-17 to 2024-12-18	40
34	Histogram of “Fitting RMS” for 2024-12-17 to 2024-12-18	41
35	Histogram of “DOAS fit wavelength shift” for 2024-12-17 to 2024-12-18	42
36	Histogram of “DOAS fit wavelength squeeze” for 2024-12-17 to 2024-12-18	43
37	Histogram of “Airmass factor” for 2024-12-17 to 2024-12-18	44
38	Histogram of “Effective temperature” for 2024-12-17 to 2024-12-18	45
39	Histogram of “Number of iterations for vertical column retrieval” for 2024-12-17 to 2024-12-18	46
40	Along track statistics of “QA value” for 2024-12-17 to 2024-12-18	47
41	Along track statistics of “O ₃ vertical column” for 2024-12-17 to 2024-12-18	48
42	Along track statistics of “O ₃ vertical column precision” for 2024-12-17 to 2024-12-18	49
43	Along track statistics of “O ₃ slant column” for 2024-12-17 to 2024-12-18	50
44	Along track statistics of “O ₃ slant column precision” for 2024-12-17 to 2024-12-18	51
45	Along track statistics of “Number of iterations for slant column retrieval” for 2024-12-17 to 2024-12-18	52
46	Along track statistics of “Fitting RMS” for 2024-12-17 to 2024-12-18	53
47	Along track statistics of “DOAS fit wavelength shift” for 2024-12-17 to 2024-12-18	54
48	Along track statistics of “DOAS fit wavelength squeeze” for 2024-12-17 to 2024-12-18	55
49	Along track statistics of “Airmass factor” for 2024-12-17 to 2024-12-18	56
50	Along track statistics of “Effective temperature” for 2024-12-17 to 2024-12-18	57
51	Along track statistics of “Number of iterations for vertical column retrieval” for 2024-12-17 to 2024-12-18	58

List of Tables

1	Parameterlist and basic statistics for the analysis	2
2	Percentile ranges	3
3	Parameterlist and basic statistics for the analysis for observations in the northern hemisphere	4
4	Parameterlist and basic statistics for the analysis for observations in the southern hemisphere	5
5	Parameterlist and basic statistics for the analysis for observations over water	6
6	Parameterlist and basic statistics for the analysis for observations over land	7

11 Copyright information of ‘PyCAMA’

Copyright © 2005 – 2023, Maarten Sneep (KNMI).

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

This software is provided by the copyright holders and contributors “as is” and any express or implied warranties, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose are disclaimed. In no event shall the copyright holder or contributors be liable for any direct, indirect, incidental, special, exemplary, or consequential damages (including, but not limited to, procurement of substitute goods or services; loss of use, data, or profits; or business interruption) however caused and on any theory of liability, whether in contract, strict liability, or tort (including negligence or otherwise) arising in any way out of the use of this software, even if advised of the possibility of such damage.

Maarten Sneep (maarten.sneep@knmi.nl).